


GeneralCable
SINGLE CONDUCTOR #14AWG
125C 600V

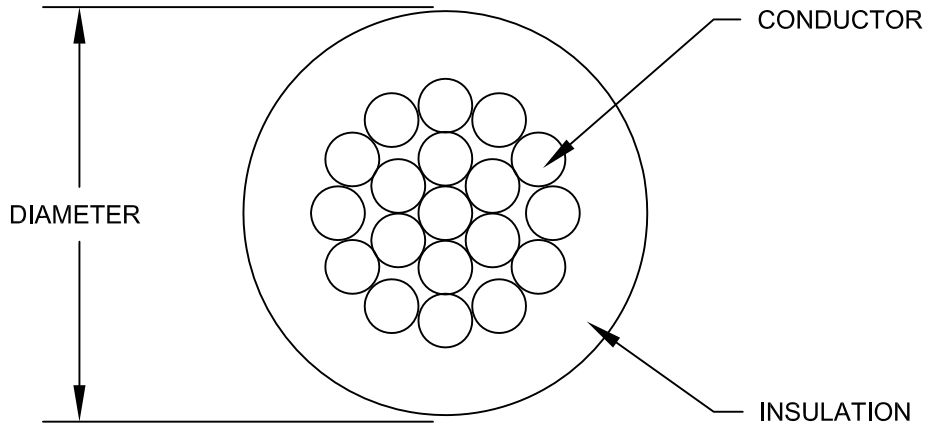

MATERIAL

CONDUCTOR: #14AWG 19/0.0142 TINNED COPPER
 INSULATION: POLYRAD XT 0.030" NOMINAL WALL IRRADIATED CROSSLINKED POLYOLEFIN
 DIAMETER: 0.127" NOMINAL

REQUIREMENTS

CONDUCTOR DIAMETER: 0.067" NOMINAL
 CONDUCTOR DCR: 2.91 OHMS/1000' @ 25°C
 TEMPERATURE: 125°C
 VOLTAGE: 600V RMS
 CABLE WEIGHT: 18 LBS/1000 FT.
 COLOR: WHITE

PRINT LEGEND

GC 41A313392DAP2 14AWG MONTH/YEAR

REVISIONS	0	10/23/14	FIRST ISSUE
	A	03/09/17	UPDATE FORMAT, VALUES



1600 West Main Street, Willimantic, CT 06226-1128

DRAWING NO: **11-2338**

REFERENCES	GE P/N: 41A313392DAP2
	GENERAL CABLE P/N: 266430.09.61

DRAWN BY: R.HALLER | APPROVED BY: E.ABERBACH

THIS DRAWING IS THE PROPERTY OF GENERAL CABLE AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF GENERAL CABLE.