

Revisions

Rev.	Description	Date	Edit By
A	6 Cond 16 awg HDPE/PUR OAFS	4/25/18	PJH

Number of Conductors: 6

AWG/Strand: 16 awg (26/30) TPC .057" Nom. Smooth Bunch

Primary Insulation: .012" Nominal Wall HDPE (HE3366)

Primary O.D.: .080" +/- .002"

Color Code: Black, Brown, Red, Orange, Blue, White

Cabled/Bunched: 3.5" Left Hand Lay

Center Filler: Fibulated Polypropylene

Drain Wire: 16awg (26/30) TPC

Overall Shield: Aluminum/Polyester (Foil In)

Separator: Tissue Paper

Jacket: .035" Nominal Wall Glossy Polyurethane


Pressure Extruded for Roundness

Jacket Color: Black

Finished O.D: .315" +/- .005"

Jacket Printed: P6C-16GBKG CE ROHS....300 V WWW.MROELECTRONICS.COM

Print: White Ink

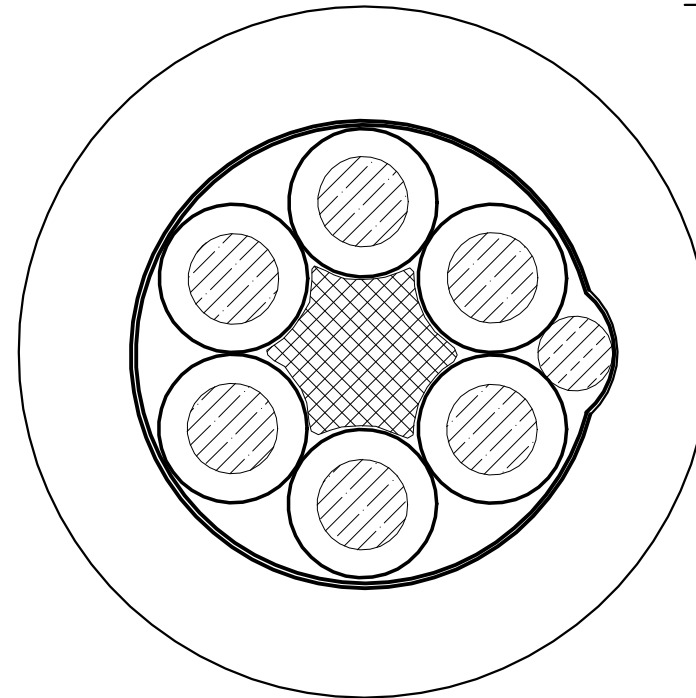

.315" +/- .005"

Drawing #:	Rev. A
------------	--------

