


232 Sherman Street Gardner, MA 01440
 Phone: 978-632-0900 Fax: 978-630-1872
 Visit us on our website; www.dataguidecable.com

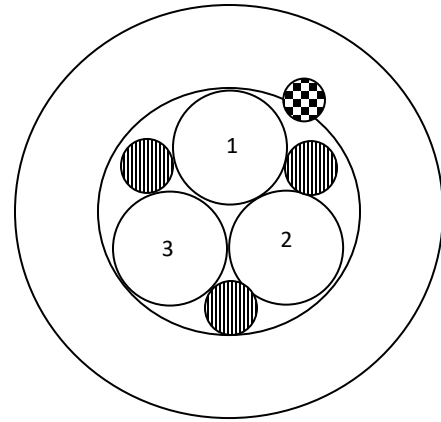

20 AWG 3 PAIR PVC/TPU FOIL FOR 80C 300V

CONDUCTORS

(3 TOTAL):

- 20 AWG 10 Strands 30 AWG Tinned Annealed Copper in Accordance with ASTM B-3 and B-8

DIELECTRIC:

- .010" Nominal Wall Thickness 105C PVC to Diameter of .056"

COLOR CODE:

- As Indicated

PAIR ASSEMBLY:

- Lay Length: 1-3/4" Nominal Left Hand Lay


CABLE ASSEMBLY:

- Lay Length: 3" Nominal Left Hand Lay
- Filler: Polypropylene in Layer Area
- Shield: .0012" Thickness Aluminum/Polyester Tape 25% Lap Foil in
- Drain: 20 10/30 Tinned Copper Under Tape Shield

JACKET:

- Material: Thermoplastic TPU (Lubrizol Estane 58202)
- Extrusion Method: Pressure
- Color: Black
- Wall Thickness: .080" Nominal
- Finished Cable Diameter: .360" Nominal (.350" Min., .370" Max)

Manufacturer's Identification:

- Type: Surface Printing in White Ink on Cable as Follows:
 "E90298  AWM Style 20233 80C 300V VW-1"

COLOR CODE

PAIR	COLOR
1	RED & BLACK
2	WHITE & GREEN
3	BROWN & ORANGE

LISTINGS/AGENCY APPROVAL

- UL AWM STYLE 20233 80C 300V
- RoHS COMPLIANT

REVISION HISTORY

0	3/27/18	WJD	FIRST ISSUE
1	3/30/18	WJD	CHANGE DRAIN, SPECIFY JACKET
2	5/24/18	WJD	CHANGE MAXIMUM FINAL O.D.

Customer Number	
D.G. Part Number	18C19-4
Prepared By: LLJ	
Reviewed By: WJD	