


Railway rolling stock cable having special fire performance
 Thin wall insulation - Single core cable
 FLAMEX Halogen free
 EN 50306-2 category M

Product reference: 2PG201

Manufacturer: Nexans

1. Conductor: Stranded tin plated copper
 nominal cross-section: 2,5 mm²
 maximum diameter: 2,15 mm
2. Insulation: FLAMEX Halogen free
 min diameter: 2,50 mm
 max diameter: 2,85 mm
 colour: white

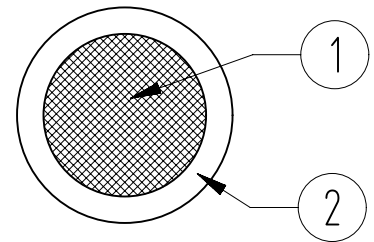

Operating voltage: 300 V
 Operating temperature: -40°C to +105°C
 Construction according to: EN 50306-2 Table 1
 Weight: 26,5 kg/km

Performance level:
 -Extra low temperature: -40°C
 -Extra Fuel Resistance: IRM 902 + IRM 903

Reaction to fire according to: EN 50306, NFF 16101 cat. A1

Antal Number	Def. Nr. Item No.	Artikel Nr. Article No.	Benämning Name		Material	Dimension	
Konstr. Designed	AnB	Ritad Drawn	JLa	Kontr. Control	AnB	Skala Scale	1:1
Cable 2,5mm ²							
					Datum/Date	Ritn. nr. Draw. no.	Blad/Sheet
Denna handling är upphovsrättsligt skyddad och får inte, utan tillstånd, delges eller överlämnas till utomstående. Överträdelse medför ansvar.					This document is copyright legislated protected and must not, without permission from Dellner Couplers, be given or handed over to any outsider. Trespass give rise to responsibility.		