


20/6 Solid CL2 Thermostat Cable

Class 2 power limited circuit cable used in thermostat control applications

Part Number 32016048

CONSTRUCTION

Conductor	Solid bare copper
Conductor Size	20 AWG, 6 conductors
Insulation	Polyethylene
Insulation Colors	Red, White, Green, Blue, Yellow, Brown
Insulation Thickness	0.006" nom.
Insulation O.D.	0.043" nom.
Lay Length	Parallel
Jacket Material	PVC
Jacket Color	Brown
Jacket Thickness	0.015"
Cable O.D.	0.160"
Approx. Cable Weight	25 lbs/MFT
Print Legend	ASCENT E478021 TYPE CL2 C(UL) 20 AWG 6/C SUN RES, TYPE CMH FT1
Approvals	UL Standard 13, NEC Article 725
Flame Rating	UL 1581 Vertical Tray Flame Test

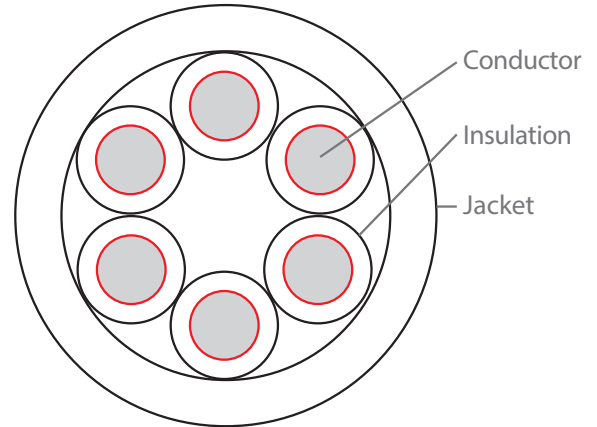

ELECTRICAL CHARACTERISTICS

Operating Temperature (°C)	-20 to 60° C
Operating Voltage	150 V
Capacitance Between Conductors @ 1 KHz	22 pF/ft nom.
DC Resistance per Conductor @ 20°C	10.73 Ohms/MFT



Application: Thermostat control

All trademarks are property of their respective owners. All specifications are subject to change.

Bristol | Unit 61, Gazelle Rd., Weston Industrial Estate, Weston-super-Mare, North Somerset BS24 9ES UK

Frankfurt | Rudolf-Braas-Strasse 2, D-61381 Friedrichsdorf

Milwaukee | 5001 South Towne Dr. New Berlin, WI 53151 USA

Suzhou | B2-2 Weiting Town Industrial - Workshop A, No. 9 Weixin Rd., Suzhou Industrial Park, Jiangsu, China 215122

Date	Rev	Description	By
2018/06/11	0	Spec created	JJM