SPECIFICATION

CABLE NAME	UL20866
CABLE SPEC	4C×22AWG(26/0.127T)

RoHS Compliant

SPEC No.	HT1802325
Version	A/2
Customer's P/N.	***

Modified record	
Modified item	Rev. record
更改印字	2018.07.20TP

ITEM		4C×22AWG(26/0.127T)
CONDUCTOR	Material	Tinned copper stranded
	Size	26/0.127±0.008mm
	O.D.（Ref）	0.76mm
INSULATION	Material	PVC
	Min.average thickness	0.30mm
	Min.thickness at any point	0.24mm
	O.D.（Ref）	1.40±0.10mm
CABLING	Filler	cotton
	Material	Paper Tape
JACKET	Material	PU
	Min.average thickness	0.76mm
	Min.thickness at any point	0.61mm
	O.D.（Ref）	5.20±0.25mm

CONSTRUCTION

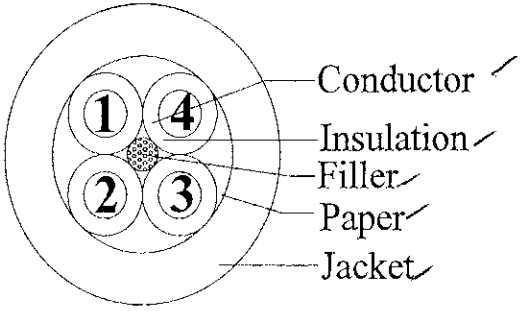

COLOR CODE

Insulation:1.brown, 2.black, 3. blue 4.white

Jacket: yellow (pantone 108C)

MARKING ON THE SURFACE

E258652 22/4 AWM STYLE 20866 80℃ 300V VW-1 — c AWM I/II A/B 80℃ 300V FT1 —PUR— UV,OIL AND WATER RESISTANT

REMARK

water resistance standard:UL62 (5.2.3 insulation)

UV resistance test:UL1581 720Hrs

Oil resistance test:UL758

ELECTRICAL CHARACTERISTICS

Rated voltage: 300V

Rated temperature: -40～80℃

Max. DC conductor resistance（20℃）: 59.4Ω/km

Voltage withstand test: AC 2.3kV/1second

Insulations resistance: Min 10MΩ*km

PHYSICAL PROPERTIES

Tensile strength:	≥10.3MPa
Elongation:	≥100%
Aged condition:	113±1℃×168h
Percent of original tensile strength:	≥70%
Percent of original elongation:	≥65%
Bending radius: Min 5×OD	
Cold Bend(-40±1℃X4hrs)	No Crack

HWATEK

昆山信昌电线电缆有限公司

Kunshan Hwatek Wires and Cable Co., Ltd.

Add: No.528,Xinsheng Road,Huaqiao Town ,Kunshan City

Tel: 0512-57699518 Fax: 0512-57699516 Post: 215332

Approved	Yuan	Customer approved	
Checked		Customer signature	
Drawing	TaoPan		
Date	2018.05.21	Date	

Approved Matt Herbers July 20, 2018