


# CUSTOM PRODUCT

YOU ARE HEREBY NOTIFIED THAT ANY DISSEMINATION, DISCLOSURE, COPYING OR DISTRIBUTION OF THE IDEAS, INFORMATION OR DESIGNS THEREIN SHOWN WITHOUT OUR WRITTEN PERMISSION IS STRICTLY PROHIBITED.

**CUSTOMER APPROVAL:**  AS IS  WITH NOTED CHANGES

Customer name: \_\_\_\_\_  
 Customer signature: \_\_\_\_\_  
 Company name: \_\_\_\_\_  
 Contact number: \_\_\_\_\_  
 Date: \_\_\_\_\_  
 Custom Products Are Non-Cancellable & Non-Returnable

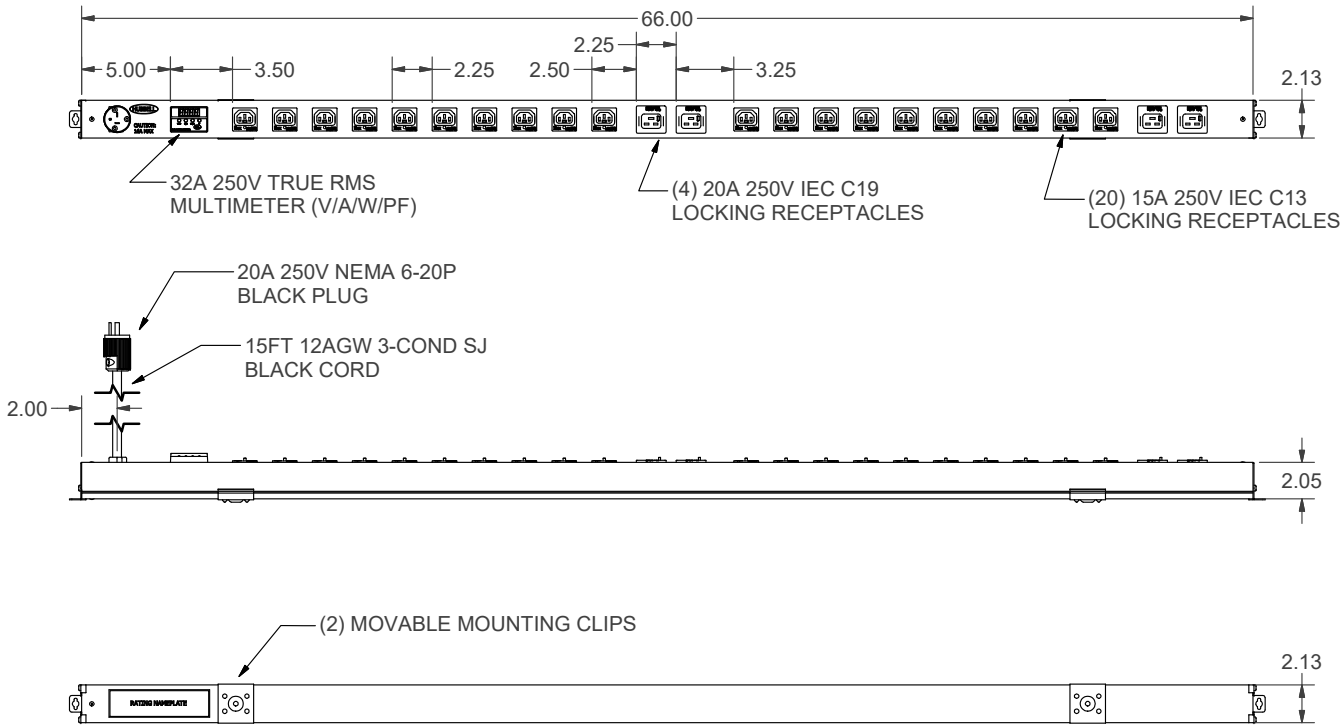

**NOTES:**

1. ALL DIMENSIONS ARE IN INCHES W/ +/-0.06" TOLERANCE UNLESS OTHERWISE SPECIFIED.
2. THIS PDU MUST BE PLUGGED INTO A CIRCUIT THAT HAS OVERCURRENT PROTECTIVE DEVICE RATED AT NO MORE THAN 125% OF MAXIMUM CURRENT DRAW.

**INPUT**  
 20A 250V NEMA 6-20P  
 MAXIMUM CURRENT DRAW = 16A

**OUTPUT**  
 (20) 15A 250V IEC C13  
 (4) 20A 250V IEC C19  
 MAX TOTAL LOAD = 4000VA (16A @ 250V)

ETL REF. No. H1V6615S3N24VM

	CERTIFIED TO CAN/CSA STD C22.2 NO. 60950-1-03 CONFORMS TO UL STD 60950-1	
	MAXIMUM TOTAL LOAD = 4000VA (16A @ 250V)	
DESCRIPTION: 66" H1V, 15FT 12/3SJ CORD, 6-20P, (20) C13, (4) C19, MTR		
POWER: 20A 250V 60Hz NEMA 6-20P		
FINISH: TEXTURED BLACK		MATERIAL: ALUMINUM
	Hubbell Canada 870 Brock Road South Pickering Ontario	
	CAT No: H1V6615S3N24A19560	
DRWN BY: SR	PROJ'T NO:	
APR'D BY: RC	DRAWING NO: A19560	
DATE: 08/17/2018	SHEET: 1 of 1	SCALE: NTS

