


YOUR SIGNATURE CONSTITUTES THAT YOU HAVE READ AND AGREED TO THIS SPECIFICATION SHEET AND UPON CONFIRMATION OF YOUR ORDER, THIS ITEM MAY BE NON-CANCELABLE AND NON-RETURNABLE.

Signature: *[Handwritten Signature]*

Date: 11/15/2020

Company: Estelich/Dike Process

"This is an uncontrolled document once printed"

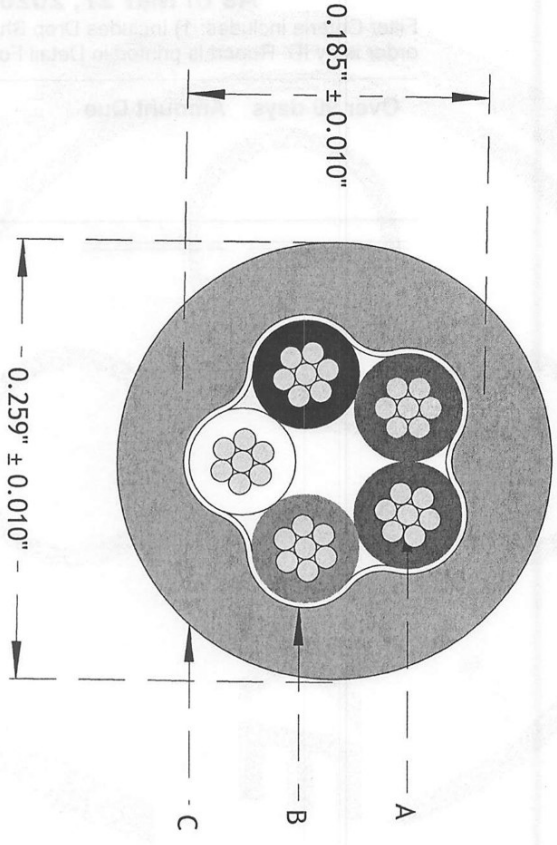

A: 20 AWG 5 Conductors 7 Strands BC PVC Insulated  
 Size and Stranding: 20 AWG 7/0.0121  
 Metal Type: Annealed Bare Copper  
 Nominal Wire Diameter: 0.037

Insulation Type: Polyvinylchloride  
 Nominal Insulation Thickness: 0.015  
 Nominal Conductor Diameter: 0.067  
 Color Code: Black, Brown, Red, Green, White  
 Cable Lay: 4.50 Left Hand Lay

B: Tissue Paper Separator under Jacket, to Prevent Conductors from Adhering to Jacket  
 C: Thermoplastic Elastomer Jacket, 0.037 Nominal Thickness, Pressure Extruded,  
 Color: Gray.

Legend: N/A  
 Type of Print: N/A  
 Makers: N/A  
 Ripcord: N/A

Standards  
 \* Cable is non UL  
 \* Operating temperature: -40° C to 105° C  
 \* Max Operating Voltage: 300V  
 \* Made in USA



**20AWG 5C 7STR BC PVC GRAY**

All Dimensions are Shown in Inches

Third Angle Projection

Drawn By: JR Scale: 10 : 1

Reviewed By: MZ Sheet: 1 of 1

Cage Code: N/A

PROPRIETARY DOCUMENT  
 THIS DRAWING MAY CONTAIN PATENTED OR PROPRIETARY INFORMATION AND MUST NOT BE REPRODUCED, DISTRIBUTED OR USED FOR ANY PURPOSE WITHOUT THE WRITTEN CONSENT OF LAKE CABLE, LLC. ALL RIGHTS ARE RESERVED. TO AND ACCEPTANCE OF THE FOREGOING.

Cust. #: -

Lake's #: S205C/PVC-08

Date Created: 09/10/18

Revision	Description	Approved By	Date
R1	Update Insulation to 0.015"	RJR	03/24/20
P1	Preliminary Draft	JR	09/10/18