

ALPHA WIRE

Part Number: 18-2345

Issue: B

Page 1 of 2 Pages

Issue Date:

10/11/2018

Cable Specification

Component 1 3 PAIR
Conductor: 18 (16/30) AWG TC
Insulation: 0.032" Wall, Nom. PVC
Color Code: ALPHA WIRE COLOR CODE B
Pair: 2/Cond Cabled Together
Individually Applied:
Shield: AM Foil Tape, 25% Overlap, Min.
Drain Wire: 18 (16/30) AWG TC
Braid: TC,85% Coverage, Min.

Final Assembly 3 Components
Jacket: 0.033" Wall, Nom., PVC
Jacket OD: 0.521"
Jacket Color: SLATE

Approvals

UL: AWM/STYLE 1032
AWM/STYLE 2129
CSA: NONE
MIL: NONE
CE Compliant: YES
ROHS Compliant: YES
REACH Compliant: NO

Miscellaneous

Temperature: 90 C
Voltage: 1000 V_{RMS}
Put Ups: 1000 FT PUTUP (CONTINUOUS)
Requested Quantity: 20000Ft.

Application Notes

See picture on page 2.

PROPRIETARY NOTICE

This document and any other data disclosed herein is the sole property of Alpha Wire and may not be reproduced, used or disclosed in part or in whole without the written consent of Alpha Wire. Please note that Alpha Wire does not warrant the specifications or designs developed with regard to Form, Fit, or Functionality for any specific end use application, and that the suitability of such and any future liability associated with the manufactured items is the sole responsibility of the end user.

ALPHA WIRE

Part Number: 18-2345


Issue:

B

Page 2 of 2 Pages

Issue Date:

10/11/2018

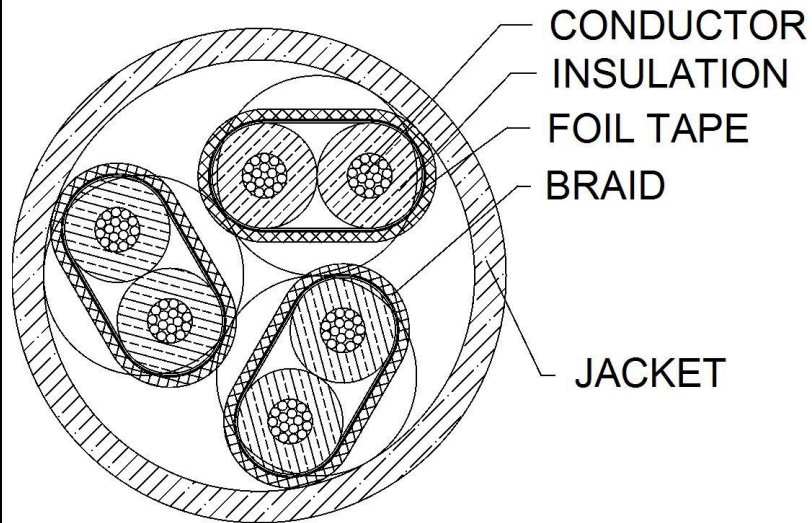

CUSTOM PRODUCTS ARE NON-CANCELLABLE & NON-RETURNABLE EXCEPT FOR MANUFACTURING DEFECTS

PROPRIETARY NOTICE

This document and any other data disclosed herein is the sole property of Alpha Wire and may not be reproduced, used or disclosed in part or in whole without the written consent of Alpha Wire. Please note that Alpha Wire does not warrant the specifications or designs developed with regard to Form, Fit, or Functionality for any specific end use application, and that the suitability of such and any future liability associated with the manufactured items is the sole responsibility of the end user.