


16 AWG 2 Conductor Plenum Fire Alarm Cable

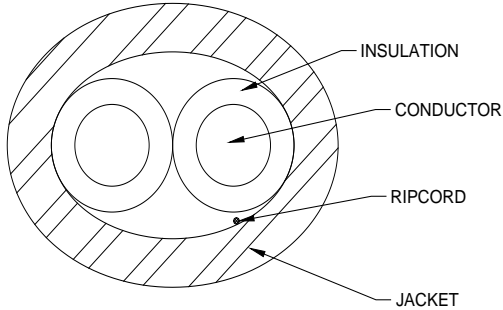

1. Construction:

- 1.1. Conductors: 16 AWG Solid Bare Copper 0.051” Nominal Diameter
- 1.2. Insulation: Plenum PVC, 0.065” Nominal Diameter
- 1.3. Color Code: Black & Red
- 1.4. Cable: Cable 2 Conductors at a 6” LHL
- 1.5. Ripcord: Ripcord located under Jacket
- 1.6. Jacket: Red Plenum PVC, 0.158” Nominal Diameter

1.7. Jacket Print:

COMTRAN CABLE LLC 16 AWG FPLP/CL3P (UL) OR CMP C(UL)US RoHS (01-12345) 000002


Sequential Footage Markings Every Two Feet

2. Compliance:

- 2.1. C(UL)US Listed Type CMP
- 2.2. UL Listed Type FPLP/CL3P
- 2.3. UL Subject 444 Communications Cables
- 2.4. UL1424, Power Limited Fire Alarm Cable
- 2.5. UL 13, Power Limited Circuit Cable
- 2.6. NFPA 262 (UL 910), Plenum Flame Test
- 2.7. NEC Article 760, 725 and 800
- 2.8. California State Fire Marshal Approved
- 2.9. RoHS Compliant

3. Electrical Characteristics:

- 3.1. Mutual Capacitance: 27 pF/FT Nominal @ 1 KHz
- 3.2. DC Resistance: 4.02Ω/1000 FT Nominal @ 20°C

TITLE:		DESCRIPTION			Comtran Cable LLC		 <small>A Marmor Wire & Cable/Berkshire Hathaway Company</small>
DS38706		16 AWG 2 Conductor Plenum Fire Alarm Cable			330A Turner Street South Attleboro, MA 02703 Phone: 508-399-7004 Fax: 508-399-8839		
Rev	Date	Detail	Eng.	App.			
5	03/18/16	Update to current format; add drawing	PB	RN	7		
4	11/16/08	Add NFPA 70 to spec	2me	RHW	7		
3	03/30/04	Add Resistance	2me	RHW			
2	12/11/03	Add twists per ft per request	2me	RHW			
1	05/03/02	Revised and redrawn	rhw	RHW			

Comtran Cable LLC Reserves the right to change the information above without prior notification. Comtran Cable LLC assumes no risk, and is not liable for direct or indirect, or consequential damages, resulting from the use of this document