


14 AWG 2 Conductor Plenum Fire Alarm Cable

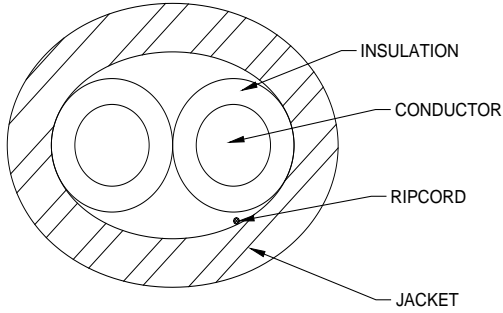

1. Construction:

- 1.1. Conductors: 14 AWG Solid Bare Copper 0.064" Nominal Diameter
- 1.2. Insulation: Plenum PVC, 0.082" Nominal Diameter
- 1.3. Color Code: Black & Red
- 1.4. Cable: Cable 2 Conductors at a 4.5" LHL
- 1.5. Ripcord: Ripcord located under Jacket
- 1.6. Jacket: Blue Plenum PVC, 0.192" Nominal Diameter

2. Compliance:

- 2.1. UL Listed Type FPLP/CL3P
- 2.2. UL1424, Power Limited Fire Alarm Cable
- 2.3. UL 13, Power Limited Circuit Cable
- 2.4. NFPA 262 (UL 910), Plenum Flame Test
- 2.5. NEC Article 760, 725
- 2.6. California State Fire Marshal Approved
- 2.7. RoHS Compliant


1.7. Jacket Print:

COMTRAN CABLE LLC 14 AWG FPLP/CL3P (UL)
RoHS (01-12345) 000002

Sequential Footage Markings Every Two Feet

3. Electrical Characteristics:

- 3.1. Mutual Capacitance: 25 pF/FT Nominal @ 1 KHz
- 3.2. DC Resistance: 2.52Ω/1000 FT Nominal @ 20°C
- 3.3. Operating Temperature Range: -4°C to +75°C

TITLE:		DESCRIPTION			Comtran Cable LLC		 <p style="font-size: small;">A Marmor Wire & Cable/Berkshire Hathaway Company</p>
DS32522		14 AWG 2 Conductor Plenum Fire Alarm Cable			330A Turner Street South Attleboro, MA 02703 Phone: 508-399-7004 Fax: 508-399-8839		
Rev	Date	Detail	Eng.	App.			
4	03/18/16	Update to current format; add drawing	PB	RN			
3	11/01/06	Dual rate; add lay; add RoHS to print	2me	RHW			
2	06/08/05	Revised and redrawn	2me	RHW			
1	06/18/03	CTC=8709 Blue JKT	2me	RHW			

Comtran Cable LLC Reserves the right to change the information above without prior notification. Comtran Cable LLC assumes no risk, and is not liable for direct or indirect, or consequential damages, resulting from the use of this document