

1) CONSTRUCTION:		NOM. DIA.
CONDUCTOR:	26 AWG 7/34 STRANDED TINNED COPPER	.019"
INSULATION:	SEMI-RIGID POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS	.039"
PAIR:	COLOR CODED SINGLES TWISTED INTO PAIRS	.078"
CABLE:	(3) TWISTED PAIRS TWISTED TOGETHER TO FORM A CABLE CORE	.122"
SHIELD:	AN OVERALL ALUMINUM POLYESTER FOIL SHIELD (FOIL OUT, 100% COVERAGE) SHALL BE APPLIED OVER THE CABLE CORE AND SHALL INCLUDE A 28 AWG STRANDED TINNED COPPER DRAIN WIRE IN CONTACT WITH THE METALIZED SURFACE.	.125"
JACKET:	POLYVINYLCHLORIDE, <b>(COLOR, PER CHART 1)</b> , .020" NOM. WALL THICKNESS	.165"
	OVERALL CABLE DIAMETER	

2) PHYSICAL PROPERTIES:  
 TEMPERATURE RATING, MAX. 60°C & 80°C  
 WT./M', NOM., NET. 15.9 LBS.  
 CHART 1:

QUABBIN P/N	JACKET COLOR
06134	CHROME
06145	BLACK

3) ELECTRICAL CHARACTERISTICS:  
 CAPACITANCE, MUTUAL, NOM. 23 PF/FT.  
 CAPACITANCE, GROUNDED, NOM. 42 PF/FT  
 DIELECTRIC WITHSTANDING, MIN 1500V RMS  
 VOLTAGE RATING, MAX. 300V  
 D.C. RESISTANCE, MAX. PER ASTM B286 42.6 Ω/1000'


4) AGENCY APPROVALS:  
 (UL) NEC TYPE CM  
 UL AWM STYLE 2095

5) APPLICATION:  
 RoHS COMPLIANT MATERIALS.

6) PRINT: (WHITE INK ON BLACK JACKET, ALL OTHERS BLACK INK)  
 E118830 (UL) TYPE CM 26 AWG OR AWM 2095 -- RoHS -- **(LOT DESIGNATOR)**

7) COLOR CODE:  
 1. BLACK X RED  
 2. BLACK X WHITE  
 3. BLACK X GREEN

8) PACKAGING:  
 TO BE PACKAGED AS PER QWC'S  
 STANDARD PACKAGING

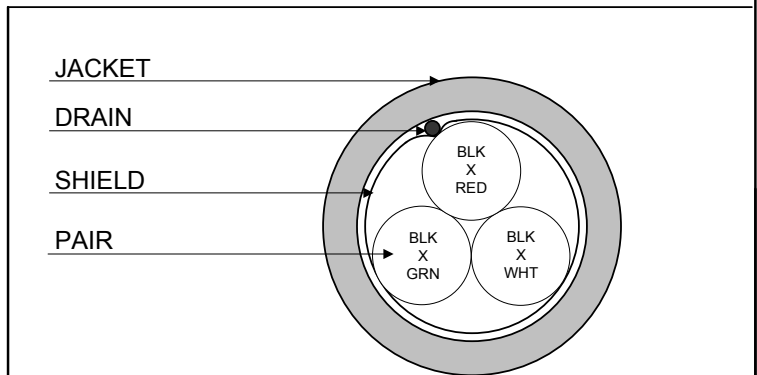

REVISION 01	DATE:	DRAWN <i>B. Duczynski</i> 7/28/11	
REVISED BY		CHECKED <i>G. Munn</i> 07/28/11	
CHECKED		CHECKED	
CHECKED		CUSTOMER APPROVAL: DATE:	TITLE 6/C (3 PR) 26 AWG PVC/PVC SHIELDED CABLE -- STYLE 2095, (UL) TYPE CM
			DRAWING # <b>QWC0028</b> 1 OF 1