


Revisions

Rev.	Description	Date	Edit By
1	2/C 20AWG OAFS Black PU	11/20/18	R.L.

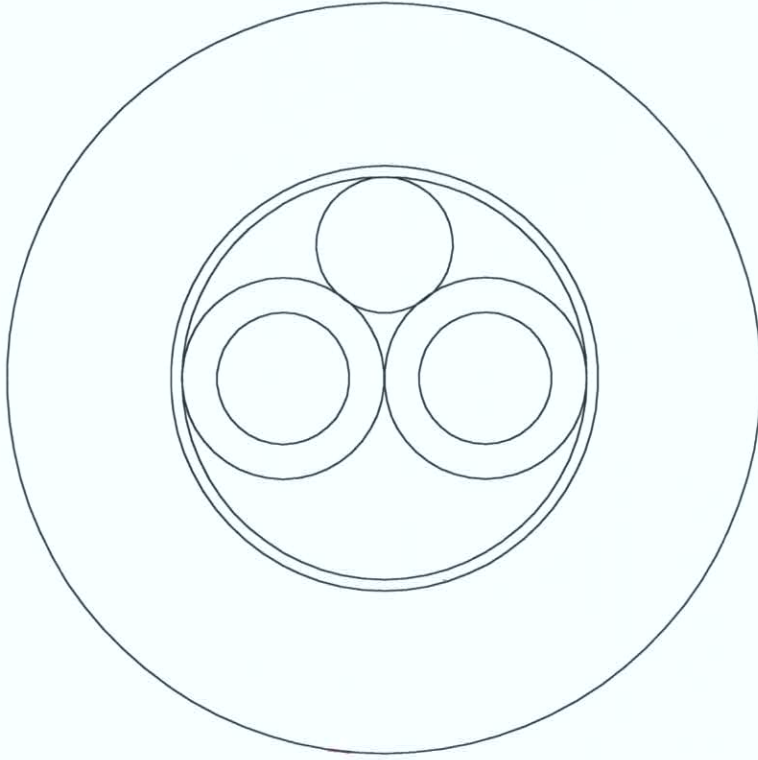

Hueson Wire C5917

- ✓ Number of Conductors: 2 Conductor Cable
- ✓ Awg/Strand: 20 awg (19/34) Tinned Plated Copper
- ✓ Insulation: .010" nominal Wall PVC
- ✓ Primary O.D.: .060" +/- .002"
- ✓ Color Code: Black, Red
- Overall Assembly
- ✓ 2 Conductors Cabled Together with a Left Hand Lay
- ✓ Drain Wire: 20 awg (7/28) Tinned Copper
- ✓ Shield: Aluminum/Mylar (Foil In - 25% Min. Lap)
- ✓ Non-Woven or tissue Separator Tape
- ✓ Jacket: .032" Nominal Wall High Gloss Polyurethane Pressure Extruded for Roundness
- ✓ Jacket Color: Black
- ✓ Finished O.D.: .187" +/- .010"
- ✓ Printed: "E174416 RU AWM 20233 80C 300V VW-1 - - - cRU AWM I/II A/B 80C 300V FT-1 CE ROHS"
- ✓ Color Print: White

Specification Accepted
In R.L.
26 Nov 2018
IAN PAULES

Drawing #:	C5917	Rev.	A
------------	--------------	------	----------

