
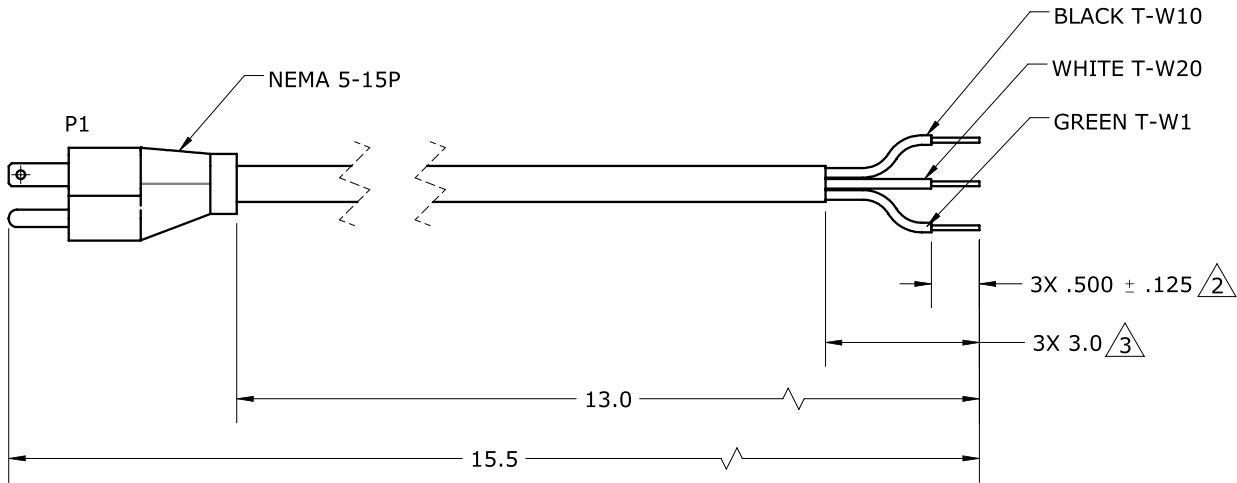


REVISIONS					
REV	DESCRIPTION	DATE	ECN	DR	CK
A	RELEASED FOR PRODUCTION, CREATED FROM 500-12	11-30-18	1876	MDA	MCB

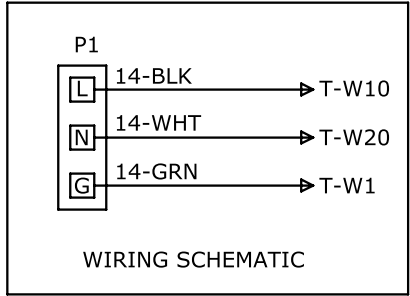

NOTES: UNLESS OTHERWISE SPECIFIED

1. CABLE REQUIREMENTS:
 - 1A.) UL LISTED SJ00W
 - 1B.) TEMP RATING +90°C/-40°C
 - 1C.) 3 WIRE, 14AWG
 - 1D.) PLUG AND JACKET COLOR TO BE BLACK

- 2 STRIP WIRE INSULATION PER THE DIMENSION SHOWN.
- 3 R.O.J. PER THE DIMENSION SHOWN.

	NAME	DATE
DRAWN BY	MDA	11-30-18
UNLESS OTHERWISE SPECIFIED: DIMENSION ARE IN INCHES		
TOLERANCES:		
X.X ± .5	WELD SYM	
X.XX ± .25	X.X ± .1	
ANGULAR ± 1°	X.XX ± .06	
PROPRIETARY AND CONFIDENTIAL		
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NATIONAL FLOORING EQUIPMENT INC. ANY REPRODUCTION IN PART OR IN WHOLE WITHOUT THE WRITTEN PERMISSION OF NATIONAL FLOORING EQUIPMENT INC PROHIBITED.		



9250 XYLON AVE N.
MINNEAPOLIS, MN 55445
763-315-5300

TITLE: **CORD, POWER, MOLDED
5-15P PLUG, 15.5"**

SIZE	DWG. NO.	REV
A	404769	A

DO NOT SCALE DRAWING SHEET 1 OF 1