



## Heyco® Original Series-35 Liquid Tight Cordgrips

### Straight-Thru, PG\* Hubs



CABLE DIA. RANGE				PART NO.			DESCRIPTION	UL or IEC	PART DIMENSIONS							
Minimum		Maximum		Including Nylon Nut**		No Nut Black ††			A Clearance Hole Dia.	B Max. O.A. Length		C Thread Length		E Wrenching Nut Flats		
in.	mm.	in.	mm.	Black	Gray		in.	mm.	in.	mm.	in.	mm.	in.	mm.		
.064	1,6	.210	5,3	<b>3444</b>	<b>3445</b>	<b>4754</b>	RLTF 7	UL	.492	12,5	1.17	29,7	.33	8,4	.59	15,0
.114	2,9	.250	6,4	<b>3207</b>	<b>3208</b>	<b>4752</b>	LTF 7									
.069	1,8	.187	4,7	<b>3446</b>	<b>3447</b>	<b>4758</b>	RLTF 9	UL	.599	15,2	1.30	33,0	.34	8,6	.75	19,1
.181	4,6	.312	7,9	<b>3210</b>	<b>3211</b>	<b>4756</b>	LTF 9									
.069	1,8	.260	6,6	<b>3448</b>	<b>3449</b>	<b>4762</b>	RLTF 11	UL	.733	18,6	1.46	37,1	.39	9,9	.86	21,8
.230	5,8	.395	10,0	<b>3213</b>	<b>3214</b>	<b>4760</b>	LTF 11									
.170	4,3	.450	11,4	<b>3216</b>	<b>3217</b>	<b>4764</b>	LTF 13.5	UL	.804	20,4	1.53	38,9	.41	10,4	.95	24,1
.230	5,8	.546	13,9	<b>3219</b>	<b>3220</b>	<b>4766</b>	LTF 16	UL	.886	22,5	1.66	42,2	.45	11,4	1.05	26,7
.250	6,4	.485	12,3	<b>3454</b>	<b>3455</b>	<b>4748</b>	RLTF 21	UL	1.115	28,3	1.87	47,5	.52	13,2	1.30	33,0
.450	11,4	.709	18,0	<b>3222</b>	<b>3223</b>	<b>4768</b>	LTF 21									
.590	15,0	.990	25,1	<b>3225</b>	<b>3226</b>	<b>4770</b>	LTF 29	UL	1.470	37,3	2.23	56,6	.59	15,0	1.66	42,2

Standard colors black and gray.



\*Steel conduit threads per DIN 40430, see page 3-55

\*\*Nylon locknuts shipped unassembled

††For No Nut Part Nos. in gray color please visit our Cordgrip product section at heyco.com

For larger sizes, see Heyco-Tite Liquid Tight Cordgrips on page 3-3.

- Wide range of approved cable diameters.
- IP 68 rated.
- Acme threads on body prevent skipping and speed installation.
- For use in clearance or threaded holes.
- All nylon construction with TPE sealing gland resists salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents. (This feature is not assessed by UL.)
- PG hub threads are steel conduit threads per DIN 40430, see page 3-49.
- Multiple sizes for flexible cord diameters ranging from .064" (1,6 mm) to .990" (25,1 mm). For larger sizes, see Heyco-Tite Liquid Tight Cordgrips on page 3-3.
- We recommend using the fitting with the smallest maximum diameter that will fit your application.
- **Unassembled Nylon Locknuts INCLUDED.**
- For Heyco Liquid Tight Threaded Plugs, see page 3-49.
- Consult Heyco for cordgrips molded in other colors.

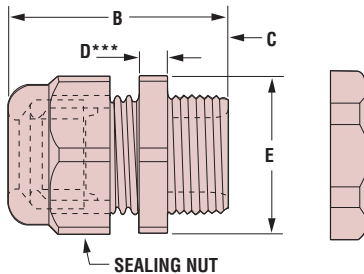

SUGGESTED CLEARANCE HOLE FOR NONTHREADED MOUNTING

\*\*\*Consult Heyco for Wrenching Nut Thickness "D"

Material	Nylon 6/6 with TPE Sealing Gland
Certifications	<ul style="list-style-type: none"> <li>UL Listed under Underwriters' Laboratories File E51579</li> <li>RU Recognized under the Component Program of Underwriters' Laboratories File E51579</li> <li>CS Certified by Canadian Standards Association File 93876C</li> </ul>
Flammability Rating	94V-2
Temperature Range	Static -40°F (-40°C) to 239°F (115°C) Dynamic -4°F (-20°C) to 212°F (100°C)
IP Rating	IP 68 (70 PSI, 5 BAR)

Quick Specs