


TECHNICAL DATA SHEET

Cable Diagram

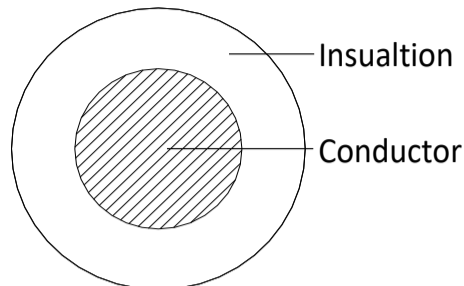

Description

Cable Part Code*	HKX41.5
Cable Description	1.5 mm ² XLP Hookup wire
Cable References Standards	BS EN 50525-3-41

Conductor

Conductor Material	Stranded Bare Copper
Conductor Size	1.5 mm ² (16 AWG)

Insulation

No. of Cores / Pairs / Triads	1 Cores
Insulation Material	XLP(LSZH)
Nom. Insulation Diameter (mm)	3.24

Physical/Mechanical Properties

Temperature Rating (°C)	-40 to + 105°C
Flame / Fire Retardancy	IEC 60332-1

Electrical Properties

Voltage Rating (V)	450/750V
Max. Conductor Resistance @ 20°C (Ω/km)	13.3

*Ordering stock code will be created at the time of placing the order and the stock code will include cable part code, outer jacket color & putup length.

© 2016 Belden, Inc
All Rights Reserved.

Although Belden makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described herein are subject to error or omission and to change without notice, and the listing of such information and specifications does not ensure product availability.

Belden provides the information and specifications herein on an "AS IS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Belden be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Belden has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein. All sales of Belden products are subject to Belden's standard terms and conditions of sale.