

Li09(ST)D11Y 2x0.22mm+3x1.5mm

Caleb Cable Caleb Cable Industrial Limited

Revision History

Part NO: C3-444	Price NO:
Prepared by: CXY	Date: 2019/1/18
Approved by:	Page: 1 of 1

Product Code: Li09(ST)D11Y 2x0.22mm+3x1.5mm

Product Description

Reference Standard

Customer's sample spec. and the general standard

Multi-construction

A(2x0.22)+B(3x1.5)

Cable Construction

A+B	A(2x0.22)	B(3x1.5)
1. Conductor	Brae Copper	Brae Copper
Construction	0.10±0.008×28	0.15±0.008×84
2. Insulation	PE	PVC
Insulation Dia.(mm)	1.50±0.10×2C Twist	2.65±0.10×3C
Insulation Color	White, Red	Blue, Brown, Green/Yellow
3. Filler	
4. Al-Pet Shield	>=115%
5. Braiding Shield	Tinned Copper
Construction	T0.10±0.008×16×5	...
Coverage	65±5%	...
6. Total Non woven Tape	>=115%	
7. Outer Jacket	PUR	
Dia.(mm)	9.70±0.20	
Jacket Color	Black	

Marking


According to customer

PACKAGING

500M/Wooden Drum

Label

Design

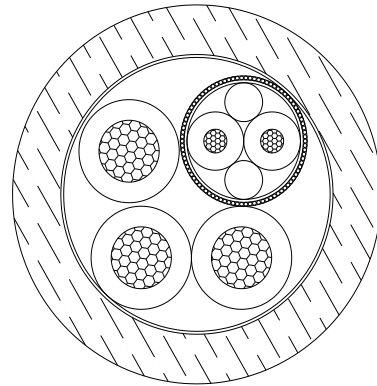

Electrical Characteristics

Max. Conductor DC Resistance at 20°C (Ω/Km)	A(2x0.22)	<84.7
	B(3x1.5)	<12.5
Rated Temperature(°C)		80
Rated Voltage(V)		300
20°C Insulation Resistance(MΩ.M)		>200

