



Hueson Wire
 38 Sutton Street
 Northbridge, MA 01534
 508-234-6372

bhanlon@huesonwire.com

Issue Date: 1/23/2019

Issue: 1

Construction

Description:	2/C 22 7/30 TC PVC/PVC BRD Clear Jkt AWM 2661	Diam. (In)
Component:	2 Conductors	
Conductor:	22 AWG 7/30 Tinned Copper to ASTM-B33	0.03"
Insulation:	0.015" Premium Grade PVC Insulation	0.06"
Color Code:	Black + Red	0.06"
Cable Assembly:	2 Conductors Cabled	0.12"
Separator:	Non-Woven Polyester Wrapping or Clear Mylar Tape Under Braid	0.123"
Braid:	Tinned Copper Braid Shield 85% min Coverage	0.123"
Jacket:	0.032" Clear PVC	0.208"
Jacket Color:	Clear	0.208"

Print: E174416 RU AWM 2661 105C 300V VW-1 --- cRU AWM I/II A 105C 300V FT-1

Specifications:	<u>AWM Style</u>	<u>Temp</u>	<u>Voltage</u>	<u>Flame</u>
UL	AWM-2661	105°C	300	VW-1
Canadian cRU	AWM	105°C	300	FT-1 I/II A/B

Environmental Compliance

- RoHS EU Directive 2011/65/EU (1&2)
- REACH Regulation 169:
- California Prop 65:


IQ180549



Hueson Wire
38 Sutton Street
Northbridge, MA 01534
508-234-6372
bhanlon@huesonwire.com

Issue Date: 1/23/2019
Issue: 1

Drawing/Rotation:

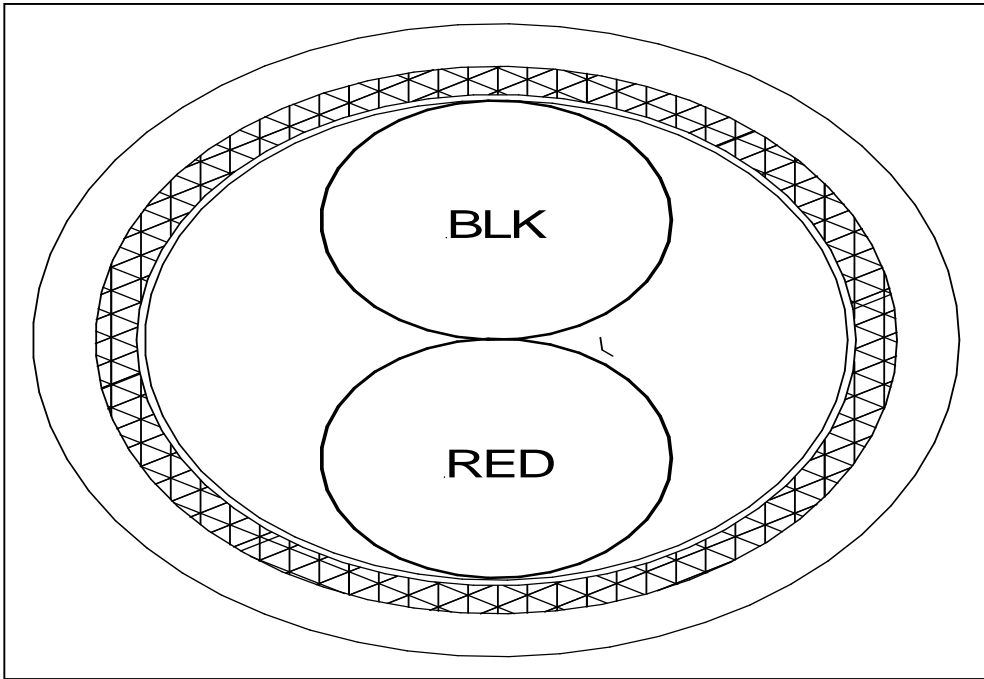

*** Fillers could be added for roundness if required

*** Jacket will be tubed to prevent braid from embedding into the jacket