


ITEM	QTY	PART NO.	DESCRIPTION	MATERIAL	FINISH	REMARKS	USED ON
1	--	611C131-01	CABLE 4 WIRE	SEE NOTES-8/9	---	SEE NOTE-5	611C130
2	--	611C131-02	CABLE 4 WIRE	SEE NOTES-8/9	---	SEE NOTE-5	611C130-05
3	--	611C131-03	CABLE 4 WIRE	SEE NOTE-2	---	SEE NOTE-4	611C130
4	--	611C131-04	CABLE 3 WIRE	SEE NOTES-8/9	---	SEE NOTE-6	611C130
5	--	611C131-05	CABLE 4 WIRE (NO VENT)	SEE NOTES-8/9	---	SEE NOTE 1	16031

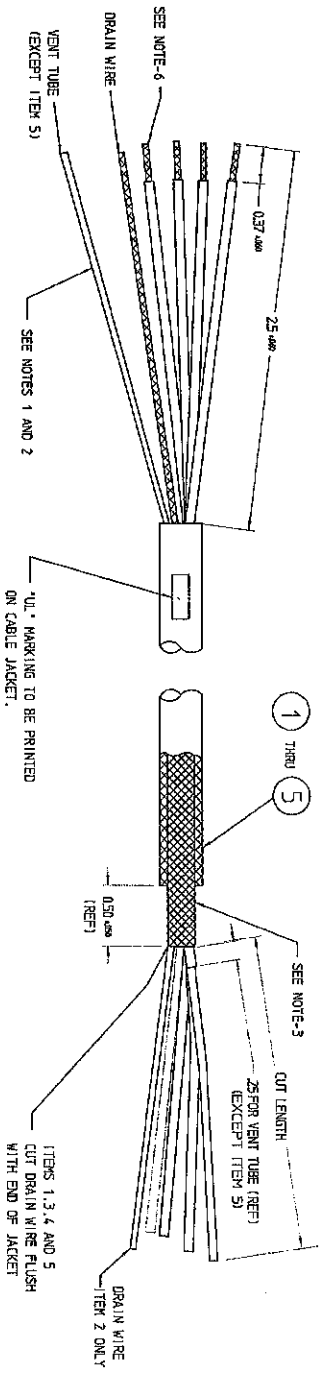

NOTE-1  
 FOR 611C131-05 CUT VENT TUBE FLUSH WITH JACKET ON BOTH ENDS.

NOTE-2  
 ASSEMBLY INSTRUCTIONS AT ONE END OF CABLE

NOTE-3  
 ASSEMBLY INSTRUCTIONS FOR CAP END OF CABLE

NOTE-4  
 CUT AND TIN ENDS OF WIRES TO NOTES 2, 83.

NOTE-5  
 DO NOT CUT DRAIN WIRE FOR ITEM 2 (611C131-02)

NOTE-6  
 CUT AND TIN ENDS OF WIRES TO NOTES 2 AND 3.  
 CUT GREEN WIRE FLUSH TO OUTER JACKET ON 611C131-04 ONLY.

NOTE-7: TEFロン CABLE SPECIFICATIONS (4 CONDUCTOR)  
 24 AWG (7/32) TIN COPPER  
 SHIELD: 90% T. C BRAID NOMINAL OUTER DIA.: 242/1000 JACKET)  
 NEC ARTICLE 725-2(18) UL LISTED COLOR CODE: YELLOW, BLACK, PURPLE, AND BLUE.

NOTE-8: CABLE SPECIFICATIONS (3 & 4 CONDUCTOR)  
 TINNED COPPER INSULATED MULTICOLOR CONDUCTOR CABLE WITH ALUMINUM NYLAR SHIELD PLUS TINNED COPPER (4) FOUR 24 AWG STRANDED (7/32) PER UL 1061, TINNED COPPER WIRE COLORS: BLACK, WHITE, RED AND GREEN, WITH PLASTIC VENT TUBE (0.012 WALL X 0.038 I.D.), BLACK PVC JACKET PER UL 2464, NOMINAL O.D. 0.235 ± 0.005 (REF WALL THICKNESS .038 ± .007).

NOTE-9  
 ALTERNATE VENDOR FOR 611C131-01 CABLE (NOTE-8):  
 ALPHA WIRE CORPORATION  
 TINNED COPPER INSULATION MULTICOLOR CONDUCTOR CABLE WITH ALUMINUM/POLYESTER SHIELD PLUS TINNED COPPER 24 AWG (7/32) DRAIN WIRE, FOUR (4) 24AWG STRANDED (7/32) PER UL 1061, TINNED COPPER WIRE COLORS: WHITE, RED AND GREEN, WITH TEFロン VENT TUBE (0.012 WALL X 0.038 I.D.), BLACK PVC JACKET PER UL 2464, NOMINAL O.D. 0.235 ± 0.005 (REF WALL THICKNESS .038 ± .007), NYLON FILTERS, TEMPERATURE RANGE -20°C TO 80°C, VOLTAGE RATING 300 VOLTS.

NOTE-10  
 ALTERNATE VENDOR FOR 611C131-01 CABLE (NOTE-8):  
 DATA GUIDE WIRE CO.  
 102 E. BROADWAY  
 GARDNER MA. 01420  
 VENDOR PART NUMBER 9482-6

TINNED COPPER INSULATED MULTICOLOR CONDUCTOR CABLE WITH ALUMINUM/POLYESTER SHIELD PLUS TINNED COPPER 24 AWG (7/32) DRAIN WIRE, FOUR (4) 24AWG STRANDED (7/32) PER UL 1061, TINNED COPPER WIRE COLORS: BLACK, WHITE, RED, AND GREEN, WITH TEFロン VENT TUBE (0.012 WALL X 0.038 I.D.), BLACK PVC JACKET PER UL 2464, NOMINAL O.D. 0.235 ± 0.005 (REF WALL THICKNESS .038 ± .007), NYLON FILTERS, TEMPERATURE RANGE -20°C TO 80°C, VOLTAGE RATING 300V, CABLE SURFACE IS PRINTED PER UL & CSA REQUIREMENT.

ITEM	QTY	PART NO.	DESCRIPTION	MATERIAL	FINISH	REMARKS	USED ON
1	--	611C131-01	CABLE 4 WIRE	SEE NOTES-8/9	---	SEE NOTE-5	611C130
2	--	611C131-02	CABLE 4 WIRE	SEE NOTES-8/9	---	SEE NOTE-5	611C130-05
3	--	611C131-03	CABLE 4 WIRE	SEE NOTE-2	---	SEE NOTE-4	611C130
4	--	611C131-04	CABLE 3 WIRE	SEE NOTES-8/9	---	SEE NOTE-6	611C130
5	--	611C131-05	CABLE 4 WIRE (NO VENT)	SEE NOTES-8/9	---	SEE NOTE 1	16031

REVISION	DATE	BY	DESCRIPTION
1	1/22/02	...	...
2	1/22/02	...	...
3	1/22/02	...	...
4	1/22/02	...	...
5	1/22/02	...	...

SCALE	SHEET NO.	TOTAL SHEETS
1/1	1	1

DATE	BY	DESCRIPTION
1/22/02	...	...
1/22/02	...	...
1/22/02	...	...
1/22/02	...	...
1/22/02	...	...

DATE	BY	DESCRIPTION
1/22/02	...	...
1/22/02	...	...
1/22/02	...	...
1/22/02	...	...
1/22/02	...	...