




DESC: 18/2 CABLE 105C 600V	DWG NO: FCAB182-ECI
SCALE: 20X	DATE: 3/14/11
DR. BY: DPL	NWI P/N: SEE BELOW
CUSTOMER: Electrical Components	CUSTOMER P/N: SEE BELOW

This document contains proprietary and confidential information of Northwire, Inc. (and its subsidiary) and shall not be used, disclosed or reproduced, in whole or in part, for any purpose without the prior written consent of Northwire, Inc. (and its subsidiary).

Disclaimer: The technical data that is made part of this document may be subject to the International Traffic in Arms Regulation (ITAR) and the Export Administration Regulations (EAR). Disclosure of technical data to Foreign Persons in the course of employment with U.S. contractors is considered an export and is subject to the ITAR and EAR export licensing requirements/regulations.

ITEM	SPECS.
A.	18 GAUGE 25X32BC BUNCHED
B.	30 MILS PVC INSULATION 105C 600V 27 MILS MIN. PVC INSULATION O.D. .110±.002"
C.	TISSUE PAPER SEPARATOR
D.	45 MILS PRESSURED PVC JACKET 105C 600V 36 MILS MIN. PVC JACKET BLACK JACKET UV AND OIL RESISTANT JACKET CABLE IS NOT UL OR CSA APPROVED

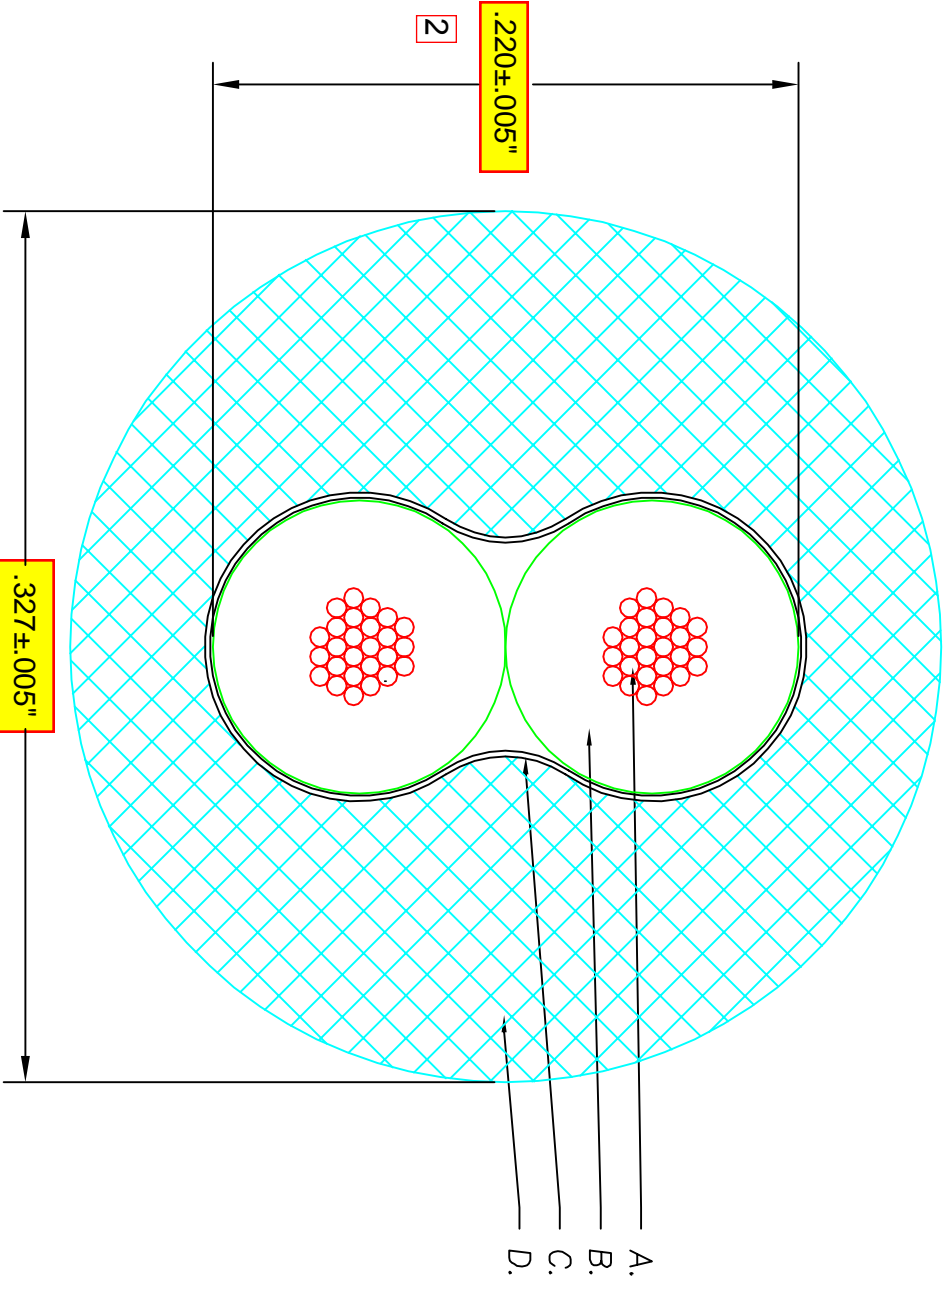

ELECTRICAL REQUIREMENTS:
NONE SPECIFIED

MECHANICAL REQUIREMENTS:
NONE SPECIFIED
CORE DIMENSIONS FOR INTERNAL USE ONLY

ECI P/N:	NWI P/N:	COND. COLORS
PCW1106	FCAB182-075	YELLOW, BLUE
PCW1107	FCAB182-076	BLACK, WHITE

INITIAL RELEASE	REVISION RECORD
A	3/14/11 DPL
REV	REV DATE APR 1 APR 2 QA R

ECI
PCW1106
NORTHWIRE, INC.
CONDUCTOR 18AWG
YELLOW/BLUE JACKET UV