


REV.	DESCRIPTION	DATE
0	Initial release.	2/3/2015

**General Properties
Application**

High voltage 35mm² 551/.28mm BC HVFX Thinwall Cable
Hybrid or Electric powered Vehicles

General Composition of Cable

See Below

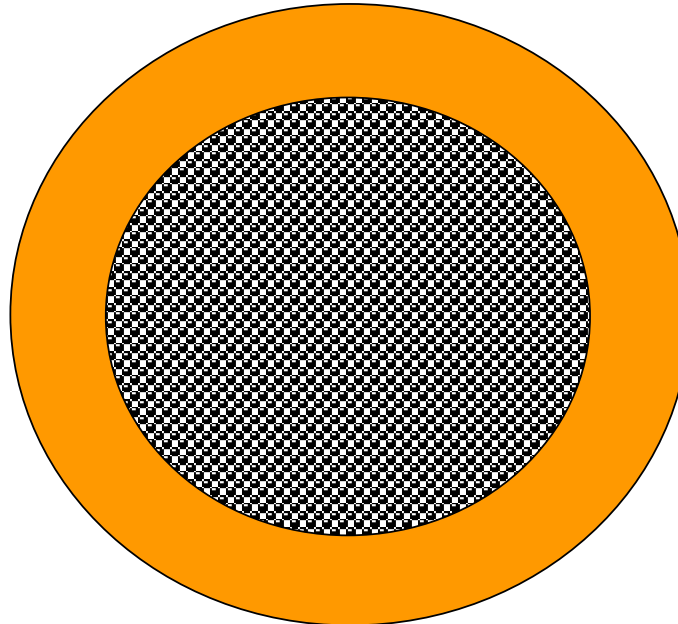

Color Code

Inner	Orange
Outer Jacket	Orange

Physical Data

Description	
1. Conductor:	35mm ² 551/.28mm bare copper
2. Insulation:	EXRAD HVFX wall thickness: 35 mil

Dimensions (Nom.)	
inches	mm
0.320	8.13
0.390	9.90

Electrical Data

Resistance: 0.489min, 0.527max mOhm/M at 20°C
Voltage Rating: 1,000 volts maximum per SAE J1654

General Data

Use: High Voltage Power Cables for Electric or Hybrid Vehicles
Temperature Range: -40° C to +150° C
Primary Insulation: ISO 6722 Class D Thin Wall
UV Resistance: 1500 hours Xenon Arc Lamp
Bend Radius: inches mm
0.0 0



TITLE	35mm ² 551/.28mm BC HVFX Thinwall	
-------	--	--

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS AND TOLERANCES
ARE IN INCHES

DO NOT SCALE THIS DRAWING

DRN.	Richard Antic	DATE	2/3/2015
CKD.		DATE	
SIZE	PART NUMBER	DOCUMENT NUMBER	14948
A			

The information on this drawing is the proprietary property of Champlain Cable Corporation, and may not be used, reproduced or disclosed to others, in whole or in part, without written authorization.