


568B	Pin out	568B
white-orange	1	1
orange	2	2
white-green	3	3
green	6	6
blue	4	4
white-blue	5	5
white brown	7	7
brown	8	8

Fig3

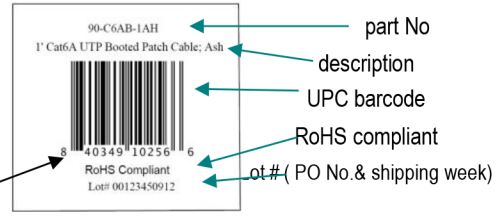

1: Electrical test

- 1.1 100% short and open test, miss wire test
- 1.2 Insulation resistance: DV 300V 500M Ohm Min
- 1.3 TIA/EIA Channel test by Fluke tester, random test, 250Mhz ,
- 1.4 568B-568B pin out

2: All material are RoHS compliant

Part No	Name	Specification	Qty
1	Cable	UTP Cat6 4pair, Cu 24AWG 7*0.19mm, PVC jacket, OD 5.8+/- 0.2	
2	Connector	8P8C RJ45 plug, 50u"gold plated Pins, unshielded,with curve shrapnel	2
3	Boot	clear boot,aseembly type	2
4	Polybag	Weltron bag,	1
5	cable tie	same color cable tie	2
6	Label	black print, white background	1

V2005

Winston International Ltd.			
Product	UTP CAT6 24AWG CU PATCH CORD		
Part No	90-C6CB-series	ICON	Toerance
Drawn by			x. +/- 1.00
Checked by	Peter		X.X +/- 0.50
Approved by	Bill		Scale mm
Version	A	Date	20160218