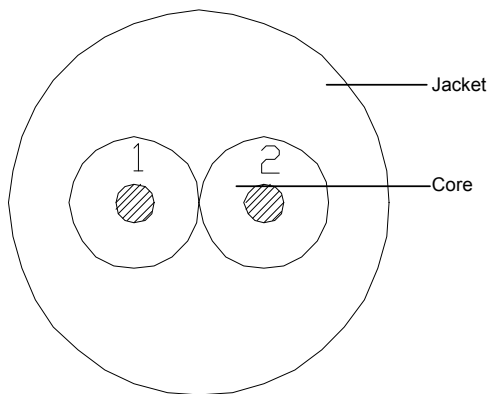




Product Specification

<p>Part No.:XB24645058 UL 2464 2CX18AWG</p>	<p>Color</p> <p>Insulation 1~2.Black(numbered 1~2)</p> <p>Jacket Per the customer's request</p> <p style="text-align: center;">22-0224.006 XB2464505808L0</p>																														
Cross Section																															
																															
Marking																															
<p>BELDEN E357312-S 2C18  AWM STYLE 2464 80C 300V VW-1 --- c  AWM I/II A/B 80C 300V FT1 ROHS</p>																															
Description																															
<table border="0"> <tr><td>Rated Temperature (°C)</td><td>80</td></tr> <tr><td>Rated Voltage (V)</td><td>300</td></tr> <tr><td>Product Standard Certification</td><td>UL</td></tr> <tr><td>Stranded tinned copper conductor</td><td></td></tr> <tr><td>Lead free PVC insulation</td><td></td></tr> <tr><td>Lead free PVC jacket</td><td></td></tr> <tr><td>Comply with ROHS</td><td></td></tr> <tr><td>Conductor accord IEC60228 Class5</td><td></td></tr> </table>		Rated Temperature (°C)	80	Rated Voltage (V)	300	Product Standard Certification	UL	Stranded tinned copper conductor		Lead free PVC insulation		Lead free PVC jacket		Comply with ROHS		Conductor accord IEC60228 Class5															
Rated Temperature (°C)	80																														
Rated Voltage (V)	300																														
Product Standard Certification	UL																														
Stranded tinned copper conductor																															
Lead free PVC insulation																															
Lead free PVC jacket																															
Comply with ROHS																															
Conductor accord IEC60228 Class5																															
Application																															
For internal wiring or external interconnection of electronic equipment																															
Reference Standard																															
UL 758,UL1581&CSA C22.2No.210.2 & customer's need																															
Construction																															
<table border="0"> <tr><td>Conductor</td><td>Stranded Tinned Copper</td></tr> <tr><td>2Cores</td><td>2C</td></tr> <tr><td>AWG</td><td>18</td></tr> <tr><td>Construction (mm)</td><td>41/0.16</td></tr> <tr><td>Stranded Dia. (mm)</td><td>1.17(Ref.)</td></tr> <tr><td>Insulation</td><td>SR-PVC(LF)</td></tr> <tr><td>Min. Thickness (mm)</td><td>0.21</td></tr> <tr><td>Nom. Thickness (mm)</td><td>0.26</td></tr> <tr><td>Insulation Dia. (±0.10mm)</td><td>1.70</td></tr> <tr><td>Twisting</td><td>Yes</td></tr> <tr><td>Direction</td><td>S</td></tr> <tr><td>Jacket</td><td>PVC(LF)</td></tr> <tr><td>Min. Thickness (mm)</td><td>0.75</td></tr> <tr><td>Nom. Thickness (mm)</td><td>1.00</td></tr> <tr><td>Outer Dia. (±0.25mm)</td><td>5.40</td></tr> </table>		Conductor	Stranded Tinned Copper	2Cores	2C	AWG	18	Construction (mm)	41/0.16	Stranded Dia. (mm)	1.17(Ref.)	Insulation	SR-PVC(LF)	Min. Thickness (mm)	0.21	Nom. Thickness (mm)	0.26	Insulation Dia. (±0.10mm)	1.70	Twisting	Yes	Direction	S	Jacket	PVC(LF)	Min. Thickness (mm)	0.75	Nom. Thickness (mm)	1.00	Outer Dia. (±0.25mm)	5.40
Conductor	Stranded Tinned Copper																														
2Cores	2C																														
AWG	18																														
Construction (mm)	41/0.16																														
Stranded Dia. (mm)	1.17(Ref.)																														
Insulation	SR-PVC(LF)																														
Min. Thickness (mm)	0.21																														
Nom. Thickness (mm)	0.26																														
Insulation Dia. (±0.10mm)	1.70																														
Twisting	Yes																														
Direction	S																														
Jacket	PVC(LF)																														
Min. Thickness (mm)	0.75																														
Nom. Thickness (mm)	1.00																														
Outer Dia. (±0.25mm)	5.40																														
Performance																															
Electrical Characteristics																															
<table border="0"> <tr><td>Max. Conductor DC Resistance (Ω/km)</td><td>24.82</td></tr> </table>		Max. Conductor DC Resistance (Ω/km)	24.82																												
Max. Conductor DC Resistance (Ω/km)	24.82																														
Mechanical Characteristics																															
Test Object																															
<table border="0"> <tr><td>Test Material</td><td></td><td>Insulation</td><td>Jacket</td></tr> <tr><td></td><td></td><td>SR-PVC(LF)</td><td>PVC(LF)</td></tr> </table>		Test Material		Insulation	Jacket			SR-PVC(LF)	PVC(LF)																						
Test Material		Insulation	Jacket																												
		SR-PVC(LF)	PVC(LF)																												
<table border="0"> <tr><td>Before</td><td>Tensile Strength (kg/mm²)</td><td>≥ 2.11</td><td>≥ 1.05</td></tr> <tr><td>Aging</td><td>Elongation (%)</td><td>≥ 100</td><td>≥ 100</td></tr> </table>		Before	Tensile Strength (kg/mm ²)	≥ 2.11	≥ 1.05	Aging	Elongation (%)	≥ 100	≥ 100																						
Before	Tensile Strength (kg/mm ²)	≥ 2.11	≥ 1.05																												
Aging	Elongation (%)	≥ 100	≥ 100																												
<table border="0"> <tr><td>Aging Condition</td><td></td><td colspan="2">113±2°C X 168hrs</td></tr> <tr><td>After</td><td>Tensile Strength</td><td>≥ 70%of original</td><td>≥ 70%of original</td></tr> <tr><td>Aging</td><td>Elongation</td><td>≥ 70%of original</td><td>≥ 65%of original</td></tr> </table>		Aging Condition		113±2°C X 168hrs		After	Tensile Strength	≥ 70%of original	≥ 70%of original	Aging	Elongation	≥ 70%of original	≥ 65%of original																		
Aging Condition		113±2°C X 168hrs																													
After	Tensile Strength	≥ 70%of original	≥ 70%of original																												
Aging	Elongation	≥ 70%of original	≥ 65%of original																												
<table border="0"> <tr><td>Flame test</td><td></td><td colspan="2">VW-1,FT1</td></tr> </table>		Flame test		VW-1,FT1																											
Flame test		VW-1,FT1																													
Sample Record																															
<table border="0"> <tr><td>Sample No. :</td><td></td><td></td><td></td></tr> <tr><td>Original spec no.:</td><td></td><td>Rev.:</td><td></td></tr> <tr><td>Ref. spec No. : SK-B2464-5058</td><td></td><td>Rev.:</td><td>0</td></tr> </table>		Sample No. :				Original spec no.:		Rev.:		Ref. spec No. : SK-B2464-5058		Rev.:	0																		
Sample No. :																															
Original spec no.:		Rev.:																													
Ref. spec No. : SK-B2464-5058		Rev.:	0																												
Revision History																															
<table border="0"> <tr><td>Prepared by:</td><td>LINCO</td><td>2012/11/26</td><td>Table No.:T100</td><td>Rev.: 0</td></tr> <tr><td>Approved by:</td><td>CICICHENG</td><td>2012/11/26</td><td></td><td>Page 1 of 1</td></tr> </table>		Prepared by:	LINCO	2012/11/26	Table No.:T100	Rev.: 0	Approved by:	CICICHENG	2012/11/26		Page 1 of 1																				
Prepared by:	LINCO	2012/11/26	Table No.:T100	Rev.: 0																											
Approved by:	CICICHENG	2012/11/26		Page 1 of 1																											