


General Cable
SINGLE CONDUCTOR #6AWG
125C/110C 600V

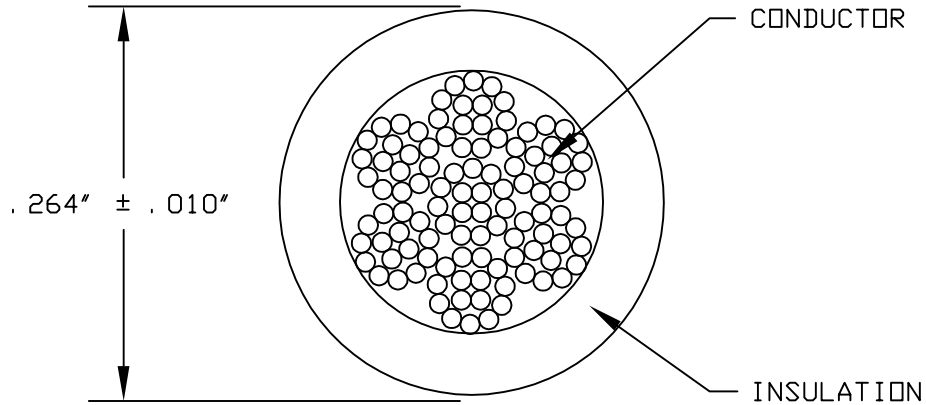

MATERIAL

CONDUCTOR: #6AWG 61/.01991 TINNED COPPER
 INSULATION: POLYRAD XT-TX .045" NOMINAL WALL
 IRRADIATED CROSSLINKED POLYOLEFIN
 DIAMETER: .264" NOMINAL

REQUIREMENTS

CONDUCTOR DIAMETER: 0.174" NOMINAL
 CONDUCTOR DCR: 0.427 OHMS/1000' @ 20°C
 TEMPERATURE: 125°C/110°C
 VOLTAGE: 600V RMS
 CABLE WEIGHT: 95 LBS/1000 FT.


COLOR

DARK GRAY

PRINT LEGEND

"GENERAL CABLE (WC) POLYRAD XT-TX 1/C 6AWG 600V DAY/MONTH/YEAR"

REVISIONS			
REFERENCES	0	7/11/17	FIRST ISSUE
			GeneralCable P/N 438810.00
			NIPPON SHARYO



General Cable

DRAWING NO: 11-2500

DRAWN BY: J. HOLDA	APPROVED BY: E. ABERBACH
--------------------	--------------------------

THIS DRAWING IS THE PROPERTY OF GENERAL CABLE AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF GENERAL CABLE.