


REV. 0	DESCRIPTION Initial release	DATE 1/21/2019
-----------	--------------------------------	-------------------

Color Code	
Cond 1	Black

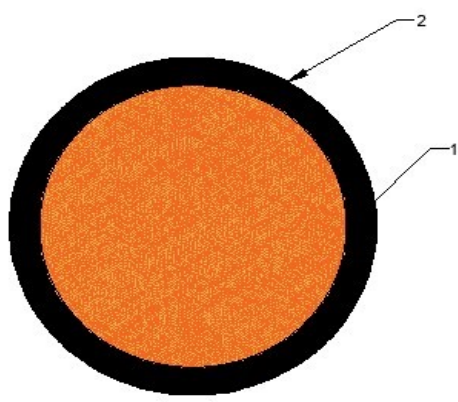


Item	Component	Description	Thickness				Dimensions						
			inch		mm		inch		mm				
			Nom	Min	Nom	Min	Nom	Tol	Nom	Tol			
1	Conductor:	4/0 AWG 2109/30 Tinned Copper											
2	Insulation:	EXAR MMT	0.060	0.055	1.52	1.40	<D>	0.730	0.004	18.54	0.10		

Print: CHAMPLAIN CABLE EXAR 1C 4/0 AWG -40C/110C 600 VOLTS  
 FT4 XLPO -40C/110C 600V MM/YYYY XXXXX  
 MM=MONTH, YYYY=YEAR, XXXXX= TRAVELER #

Weight: 745.04#/MFT Nom  
 Meets Applicable Requirement of NFPA-130 Smoke Index and Flame Propagation  
 Meets Applicable Requirement of AAR Standard RP-585

Temperature Range: -40° C to +110° C  
 Voltage Rating: 600V  
 Min Static Bend Radius: inches mm  
 5.1 130

	TITLE	4/0 AWG MMT
--	-------	-------------

Special Characteristics <S> Safety <D> Dimensional	DRN. R. TRAHAN	DATE 1/23/2018
	CKD.	DATE

DO NOT SCALE THIS DRAWING	SIZE A	PART NUMBER	DOCUMENT NUMBER 17504
---------------------------	-----------	-------------	--------------------------