



IEWC.COM  
New Berlin, WI 53151

Issue Date: 4/15/2019

Issue: 2

### Construction

Description: 4/C 20 7/28 TC PVC/PVC OAFS + Drain		Diam. (In)
Component:	4 Conductors	
Conductor:	20 AWG 7/28 Tinned Copper to ASTM B-8	0.038"
Insulation:	0.015" Premium Grade PVC	0.068"
Color Code:	White, Green, Red, Black	0.068"
Cable Assembly:	4 Conductors Bunched Cabled	0.165"
Drain Wire:	22 7/30 TC	0.165"
Shield:	Aluminum Mylar Foil Shield (Drain Out and Foil Side Out)	0.168"
Tape:	Non-Woven Separator Tissue Tape for Strip-Ability (optional)	0.168"
Jacket:	0.05" PVC Jacket	0.270"
Jacket Color:	Black	0.270"
Print: White Jet 12" Ctr	NORTHSTAR WWW.NORTHSTARLOADCELL.COM	
Specifications:	0.270" Nominal O.D. +/- .005" -40°C to + 105°C Transportation Grade AG Outdoor Jacket. Oil, Gas, Moisture and UV Resistant	


### Environmental Compliance

- EU Directive 2011/65/EC(RoHS):
- REACH Regulation (EC 1907/2006):
- California Prop 65:

IQ160258 Rev B

Issue Date: 4/15/2019  
Issue: 2

**Drawing/Rotation:**

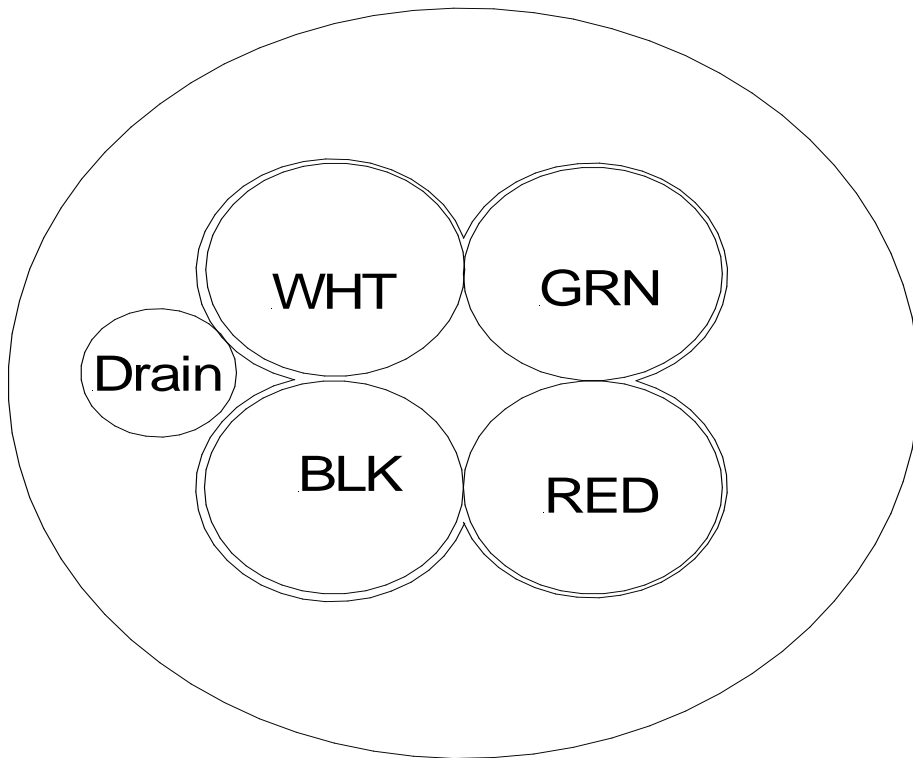

Rev 2: Changed Print Legend