


## 2kV HDFPC-DLO, RHH/RHW-2 & RW90

UL Listed as 2kV Heavy Duty Flexible Power Cable (HDFPC) DLO, Rated 90°C Dry or Wet. 2kV Type RHH/RHW-2 Flexible Power Cable Rated 90°C Dry or Wet. CSA Listed as 2kV Type RW90. Composite Thermoset Wall EPDM/CPE Insulation/Jacket. Sizes 1/0 and Larger Rated TC-ER, FT4, for Use in Cable Trays

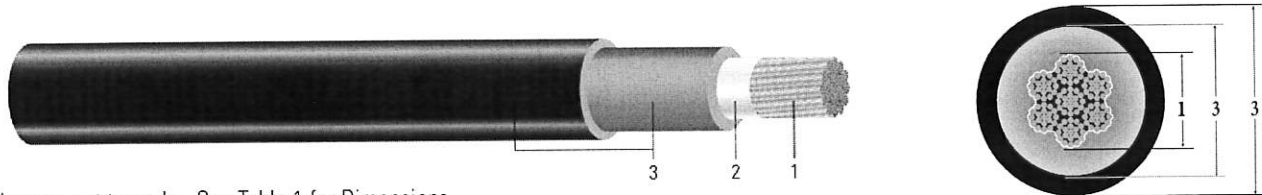

Images not to scale. See Table 1 for Dimensions

### CONSTRUCTION:

1. **Conductors:** Flexible Stranded Rope-Lay Class I Tinned Copper per ASTM B33 and B172
2. **Binder Tape:** Mylar Tape
3. **Insulation:** 2 layer Thermoset Ethylene Propylene Diene Monomer / Thermoset Chlorinated Polyethylene (EPDM/CPE)

### APPLICATIONS AND FEATURES

HDFPC-DLO is a 2kV flexible power cable with a variety of possible applications such as but not limited to: Drilling rigs, railroad and transit car wiring, mining and other industrial equipment, and as flexible motor leads and wind turbine applications. The cable is suited for use in wet and dry areas, conduits, ducts, troughs, trays, and where superior electrical properties are desired. The maximum continuous conductor temperature for normal operation is 90°C wet or dry. HDFPC-DLO is oil, heat, flame, abrasion, and sunlight resistant. Approved for use per the NEC® as Type RHH/RHW-2 and per the CE Code as 2kV Type RW90.

### SPECIFICATIONS:

- ASTM B3 - Soft or Annealed Copper
- ASTM B33 - Tinned Soft or Annealed Copper
- B172 - Rope-Lay-Stranded Copper Conductors Having Bunch Stranded Members
- UL Subject 2806 - Type HDFPC-DLO
- UL 44 - Type RHH/RHW-2
- CSA C22.2 No. 38 - Type RW90. (#12 and #10 AWG are not RW90)
- MSHA - P-07-KA100013
- IEEE 1202/FT4 - Flame Test (70,000 Btu/hr Vertical Tray Test). #8 and larger CSA. 1/0 and larger UL
- UL 1685 - Vertical-Tray Fire-Propagation and Smoke-Release Test
- ICEA S-95-658 (NEMA WC70) Power cables rated 2000 volts or less for the distribution of electrical energy

### SAMPLE PRINT LEGEND:

SOUTHWIRE® xxx SIZE AWG (xxx mm<sup>2</sup>) EPR/CPE 2KV HDFPC-DLO TYPE RHH OR RHW-2 (-40°C) P11 SUN RES FOR CT USE (UL) E30117 (CSA LOGO) LL90458 RW90 EP 2KV (-40°C) EP/CPE TC FT4 --- P-07-KA100013-MSHA SEQUENTIAL FOOTAGE MARKS.



**Southwire®**

Southwire Company, LLC | One Southwire Drive, Carrollton, GA 30119 | [www.southwire.com](http://www.southwire.com)

Copyright © 2019 Southwire Company, LLC. All Rights Reserved

SPEC 44020\_PSS DIVISION DATE: 02/14/2019 Rev:1.5.41 M

**2kV HDFPC-DLO, RHH/RHW-2 & RW90 – Table I, Physical Data**

Stock Number	Size AWG/kcmil	Conductor Strands No. / (Inch or AWG)	Diameter Inches (1)	Min. Ave. Composite Ther-moset Insulation Thickness		Nominal Overall Diameter Inches (3)	Approximate Net Weight* Lbs./1000 Ft.	Maximum Pulling Tension Pounds	Bend Radius Inches
				EPDM Layer Inches	CPE Layer Inches				
571253	12	19/0185	0.090	0.045	0.015	0.210	36	52	1.68
560057	10	26/#24	0.114	0.045	0.015	0.265	59	83	2.12
559271	8	41/#24	0.148	0.055	0.030	0.330	90	132	2.63
560058	6	63/#24	0.182	0.055	0.030	0.370	128	210	2.98
559269	4	105/#24	0.235	0.060	0.030	0.440	187	334	3.37
560059	2	161/#24	0.302	0.060	0.030	0.495	291	531	4.03
TBA	1	210/#24	0.335	0.080	0.045	0.560	260	670	4.48
560061	1/0	266/#24	0.381	0.080	0.045	0.645	488	845	5.52
560062	2/0	342/#24	0.405	0.080	0.045	0.690	558	1065	5.76
562064	3/0	418/#24	0.480	0.080	0.045	0.760	654	1342	5.81
559270	4/0	532/#24	0.535	0.080	0.045	0.815	829	1693	6.47
558160	262.6	649/#24	0.585	0.090	0.065	0.915	1,076	2101	7.73
571461	313.3	775/#24	0.652	0.090	0.065	0.980	1,271	2506	8.36
559268	373.7	925/#24	0.705	0.090	0.065	1.040	1,471	2990	8.71
560063	444.4	1100/#24	0.783	0.090	0.065	1.105	1,624	3555	9.32
558162	535.3	1325/#24	0.805	0.090	0.065	1.205	1,901	4282	9.60
571587	646.4	1600/#24	0.900	0.090	0.065	1.290	2,446	5171	10.28
558164	777.7	1924/#24	0.990	0.090	0.065	1.380	2,833	6222	10.91
TBA	929.2	2300/#24	1.115	0.090	0.065	1.471	3162	7434	11.77
578860	1111.0	2750/#24	1.170	0.115	0.095	1.730	4,127	8888	14.08

Note: All dimensions are nominal and subject to normal manufacturing tolerances.



**2kV HDFPC-DLO, RHH/RHW-2 & RW90 – Table II, Electrical Data**

Stock Number	Conductor		DC Resistance at 20°C Ω/1000 Ft.	X <sub>1</sub> - Triangular Conduit		Ampacity			
	Size AWG/kcmil	Strands No / (Inch or AWG)		PVC Ω/1000 Ft.	Steel Ω/1000 Ft.	In Conduit*		In Air**	
						75°C	90°C	75°C	90°C
571253	12	19/0185	1.690	0.041	0.053	25	30	35	40
560057	10	26/#24	1.040	0.038	0.049	35	40	50	55
559271	8	41/#24	0.654	0.039	0.052	50	55	70	80
560058	6	63/#24	0.419	0.037	0.048	65	75	95	105
559269	4	105/#24	0.263	0.035	0.046	85	95	125	140
560059	2	161/#24	0.166	0.033	0.043	115	130	170	190
TBA	1	210/#24	0.132	0.032	0.042	130	145	195	220
560061	1/0	266/#24	0.105	0.034	0.044	150	170	230	260
560062	2/0	342/#24	0.0834	0.033	0.045	175	195	265	300
562064	3/0	418/#24	0.0662	0.032	0.041	200	225	310	350
559270	4/0	532/#24	0.0525	0.031	0.040	230	260	360	405
558160	262.6	649/#24	0.0426	0.029	0.045	267	304	421	473
571461	313.3	775/#24	0.0357	0.034	0.041	298	332	453	518
559268	373.7	925/#24	0.0300	0.033	0.043	323	365	522	592
560063	444.4	1100/#24	0.0252	0.031	0.041	358	405	581	655
558162	535.3	1325/#24	0.0209	0.031	0.041	394	446	660	747
571587	646.4	1600/#24	0.0174	0.031	0.040	439	496	712	804
558164	777.7	1924/#24	0.0146	0.029	0.039	483	543	802	904
TBA	929.2	2300/#24	0.0121	0.029	0.038	529	594	886	998
578860	1111.0	2750/#24	0.0120	0.032	0.042	570	648	1012	1145

\* Ampacities based on Table 310.15(B)(16) of the National Electrical Code® for not more than three current-carrying conductors in raceway, cable or earth. Based on Ambient Temperature of 30°C (86°F)

\*\* Ampacities based on Table 310.15(B)(17) of the National Electrical Code® Allowable Ampacities of Single-Insulated Conductors Rated Up to and Including 2000 Volts in Free Air. Based on Ambient Temperature of 30°C (86°F)



**Southwire®**