

UL 2517 22AWG/4C, foil shielded cable




PRODUCT DATA SHEET

External interconnection of electric equipment or internal Wiring of electronic equipment or appliances. The design is based on UL 758, UL 1581&Style page UL 2517.

Design Number 10090
Part Number 32108290
Customer Number N/A

CONSTRUCTION

Conductor Stranded tinned copper
Conductor Size 22AWG(7/30)
Insulation Material PVC
Insulation Diameter 0.05"(Nom.)
Filler PP rope(optional)
Drain Wire 24AWG, Stranded tinned copper
Wrapping Al-mylar(Al face in)
Separator Non-woven polyester or clear Mylar
Jacket Material PVC
Avg. Thickness 0.03"(Nom.)
Overall Diameter 0.188"(Nom.)
Jacket Color Gray(Pantone 429U)
Print Legend ASCENT E477982 UH AWM
STYLE 2517 22AWG 4C 105°C 300V
VW-1 c AWM I/II A/B 105°C
300V FT-1

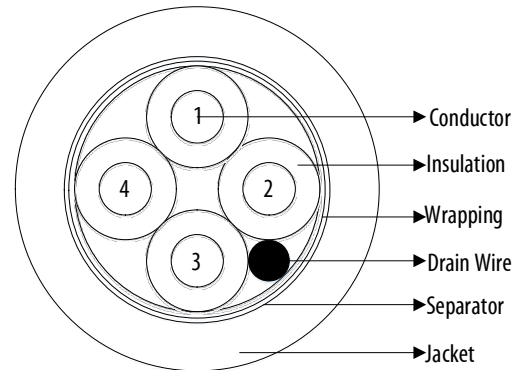

Color Code: 1. White 2. Green 3. Red 4. Black

ELECTRICAL CHARACTERISTICS

Operating Temperature 105°C
Operating Voltage 300V
Conductor Resistance@ 20°C 59.4 Ω/km Max
Dielectric Test AC 2.0 kV/1min
Flame Resistant UL VW-1

Approvals UL, C(UL),RoHS

Date	Version	Description	Created By	Approved By
2019/06/25	00	Initial Release	L.JIAN	A.HUANG