

# 14/3 Type SJOOW Black



PRODUCT DATA SHEET

This cable is suitable for control equipment on machine tools subjected to medium mechanical stresses; for fixed or flexible installation, where free movement is required without tensile stresses and without forced guidance system; and in dry, damp and wet interiors— including water-oil mixtures.

**Design Number** 10086  
**Part Number** 32108352  
**Customer Number** N/A

## CONSTRUCTION

**Conductor:** Stranded bare copper, Class K per ASTM B-174

**Conductor Size:** 14AWG(41/30)

**Insulation:** EPDM, oil resistant

**Insulation Avg. Thickness:** 0.030"(Nom.)

**Insulated Conductor O.D.:** 0.138"(Nom.)

**Assembly:** Cabling, Talc between individual cores

**Jacket Material:** CPE, oil resistant


**Jacket Avg. Thickness:** 0.030"(Nom.)

**Jacket Colour:** Black

**Overall Diameter:** 0.370"(Nom.)

### Print Legend:

ASCENT #32108352 E486041 14AWG 3/C SJOOW (UL) 300V (-40C-90C) CSA LL268042 FT-2 WATER RESISTANT P-07KA140001-MSHA —RoHS xxxxx FT

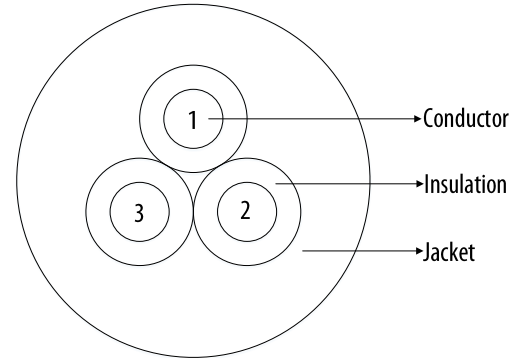

**Color Code:** 1. Black 2. White 3. Green

## ELECTRICAL CHARACTERISTICS

**Operating Temperature (°C):** -40°C to +90°C

**Operating Voltage:** 300V

**Flame Test :** UL VW-1 and CSA FT2

## SAFETY CHARACTERISTICS

**RoHS Compliance:** European Directive 2015/863/EU

**Approvals:** UL Flexible Cord, Subject 62

CSA Flexible Cord, C22.2 No.49

MSHA Approved

**Application:** Machine tools, power tools, portable machinery, submersible pumps, motor leads

*All trademarks are property of their respective owners. All specifications are subject to change.*

Revision History		
00	2019/06/20	Initial release
Created L. Jian		Approved A. Huang

**Bristol** | Unit 61, Gazelle Rd., Weston Industrial Estate, Weston-super-Mare, North Somerset BS24 9ES UK

**Frankfurt** | Rudolf-Braas-Strasse 2, D-61381 Friedrichsdorf

**Milwaukee** | 5001 South Towne Dr. New Berlin, WI 53151 USA

**Suzhou** | B2-2 Weiting Town Industrial - Workshop A, No. 9 Weixin Rd., Suzhou Industrial Park, Jiangsu, China 215122

