


# LUTRON – GREEN

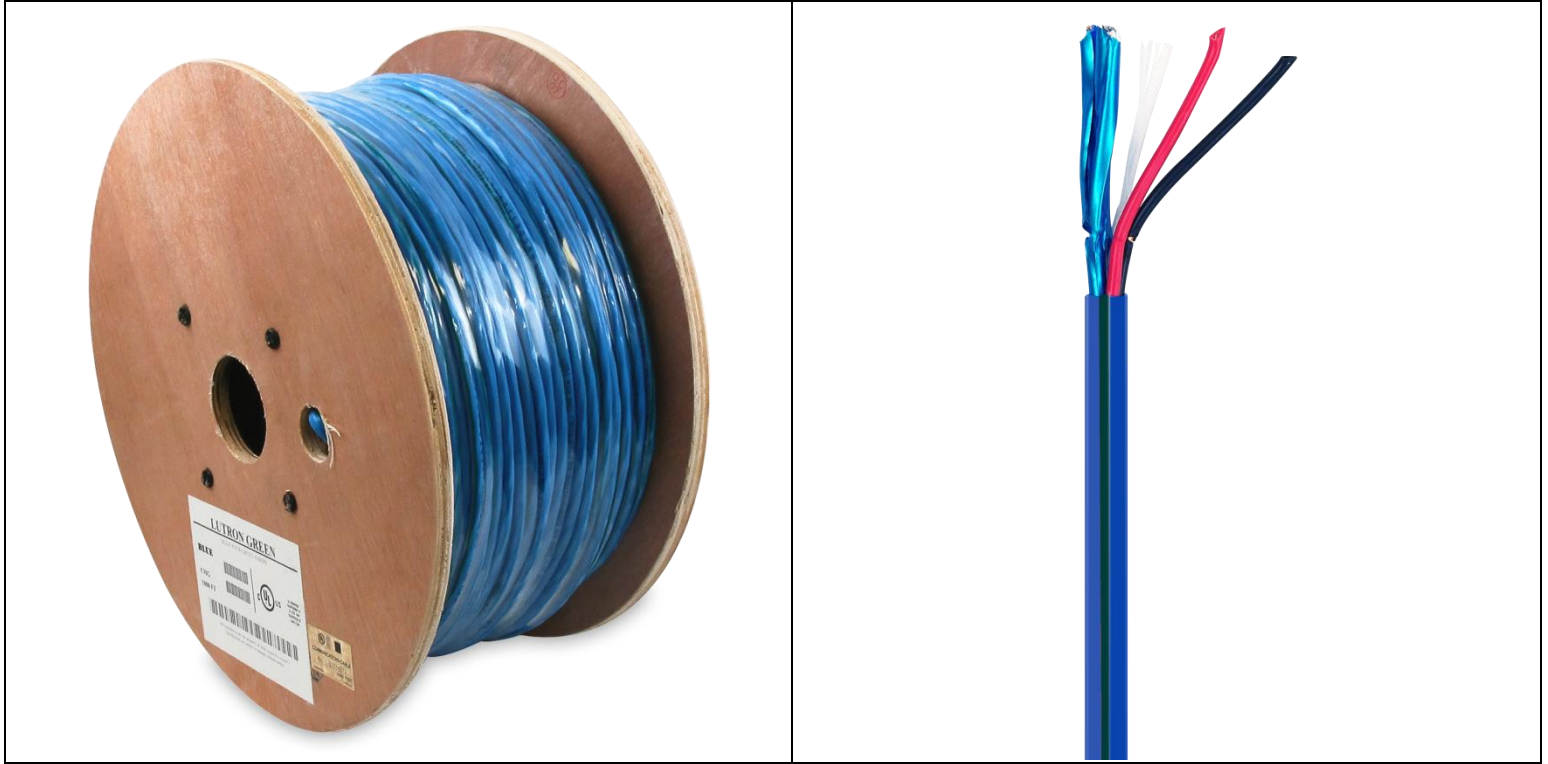

**Part No.** LUTRON-GREEN

**Color.** BLUE WITH GREEN STRIPE

## Application:

- Power-limited circuit cables for use a fixed wiring within buildings (some are also marked for direct burial) principally for class 3 and class 2 circuits.

## Description:

- **Rated Voltage (V)** 300
- **Rated Temperature (°C)** 75
- **Product Standard Certification** c(UL)CL3
- **Flame Test** FT4

# LUTRON – GREEN

## Construction:

- **Component A:** **1 Twisted Pair 2C**
- **Conductor** Standard Bare Copper  
Construction (+/- 0.008mm)  
Stranded Dia. (mm) 0.78
- **Insulation** **FOAM PE**  
Nom. Thickness (mm) 0.60  
Insulation Dia.(+/-mm) 2.0  
Color White & Blue
- **Drain Wire (Stranded Tinned Copper )** 7/0.20TC
- **Shield** **Aluminum/Polyester**  
Coverage (%)  $\geq 125\%$
- **Component B:** **2C**
- **Conductor** **Stranded Bare Copper**  
Construction (+/- 0.008mm)  
Stranded Dia.(mm) 1.20
- **Insulation** **PVC**  
Nom. Thickness (mm) 0.35  
Insulation Dia.(+/-0.05mm) 1.9  
Color: Black & Red
- **Component A.B Cable together** Ripcord 210Dx6 nylon thread
- **Jacket** **PVC**  
Nom. Thickness (mm) 0.65
- **Outer Dia.(+/-0.10mm)** **5.60**  
Jacket Marking As customer's request

