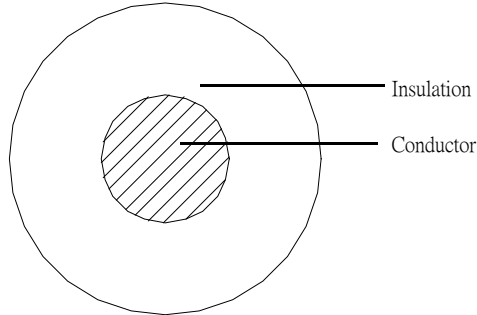




Product Specification

Part No.:	Color																		
<p align="center">Cross Section</p> 	Insulation Per request																		
<p align="center">Marking</p> <p>BELDEN E357312-S 14AWG  AWM STYLE 1534 80C 30V VW-1 - - -  AWM I A/B 80C 30V FT1 -F- ROHS</p>	<p align="center">Performance</p> <p>Electrical Characteristics: Max DC Conductor Resistance at 20°C (Ω/km) 8.96</p>																		
<p align="center">Description</p> <p>Rated Voltage (V) 30 Rated Temperature (°C) 80 Product Standard Certification UL Flammability Test UL VW-1 & CSA FT1</p> <p>Application For internal wiring of appliance</p> <p>Reference Standard UL758, UL1581 & CSA C22.2 No. 210.2</p>	<p>Mechanical Characteristics:</p> <table border="0"> <tr> <td>Test Object</td> <td>Insulation</td> </tr> <tr> <td>Test Material</td> <td>XL-PVC</td> </tr> <tr> <td>Before Tensile Strength (Mpa)</td> <td>≥ 10.3</td> </tr> <tr> <td>Aging Elongation (%)</td> <td>≥ 100</td> </tr> <tr> <td>Aging Condition</td> <td>136±2°C x 168 hrs</td> </tr> <tr> <td>After Tensile Strength (Mpa)</td> <td>≥ 70% of original</td> </tr> <tr> <td>Aging Elongation (%)</td> <td>≥ 50% of original</td> </tr> </table>	Test Object	Insulation	Test Material	XL-PVC	Before Tensile Strength (Mpa)	≥ 10.3	Aging Elongation (%)	≥ 100	Aging Condition	136±2°C x 168 hrs	After Tensile Strength (Mpa)	≥ 70% of original	Aging Elongation (%)	≥ 50% of original				
Test Object	Insulation																		
Test Material	XL-PVC																		
Before Tensile Strength (Mpa)	≥ 10.3																		
Aging Elongation (%)	≥ 100																		
Aging Condition	136±2°C x 168 hrs																		
After Tensile Strength (Mpa)	≥ 70% of original																		
Aging Elongation (%)	≥ 50% of original																		
<p align="center">Construction</p> <table border="0"> <tr> <td>1 Core</td> <td></td> </tr> <tr> <td>Conductor</td> <td>Stranded Tinned Copper</td> </tr> <tr> <td>AWG</td> <td>14</td> </tr> <tr> <td>Construction (mm)</td> <td>41/0.254</td> </tr> <tr> <td>Stranded Dia. (mm)</td> <td>1.87</td> </tr> <tr> <td>Insulation</td> <td>XL-PVC</td> </tr> <tr> <td>Min. Thickness (mm)</td> <td>0.26</td> </tr> <tr> <td>Nom. Thickness (mm)</td> <td>0.32</td> </tr> <tr> <td>Insulation Dia. (±0.15mm)</td> <td>2.60</td> </tr> </table>	1 Core		Conductor	Stranded Tinned Copper	AWG	14	Construction (mm)	41/0.254	Stranded Dia. (mm)	1.87	Insulation	XL-PVC	Min. Thickness (mm)	0.26	Nom. Thickness (mm)	0.32	Insulation Dia. (±0.15mm)	2.60	<p align="center">Sample Record</p> <p>Sample No. : Original spec no.: SZ-B1534-002 Rev.: 0 Ref. spec No. : SK-B1534-601 Rev.: 0</p>
1 Core																			
Conductor	Stranded Tinned Copper																		
AWG	14																		
Construction (mm)	41/0.254																		
Stranded Dia. (mm)	1.87																		
Insulation	XL-PVC																		
Min. Thickness (mm)	0.26																		
Nom. Thickness (mm)	0.32																		
Insulation Dia. (±0.15mm)	2.60																		
	<p align="center">Revision History</p> <p>Prepared by: ADISON 2016/6/1 Table No.:T100 Rev.: 0 Approved by: CICICHENG 2016/6/1 Page 1 of 1</p>																		