


# 16/6C, PVC/PVC, Trailer Cable



PRODUCT DATA SHEET

Trailer cables for use in automotive applications. Rated for continuous use up to 105C.

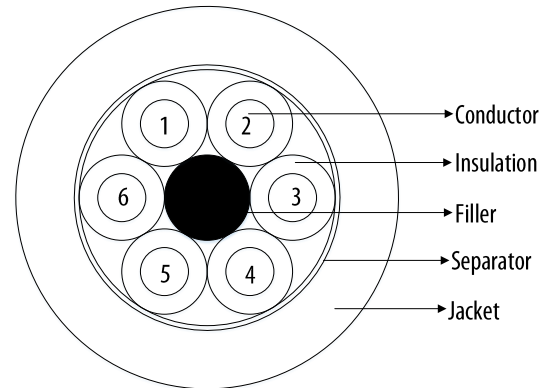

**Design Number** 10112  
**Part Number** 32109656  
**Customer Number** 10526R

**Color Code:** 1. White 2. Black 3. Red 4. Brown 5. Yellow 6. Green

## CONSTRUCTION

**Conductor:** Stranded bare copper  
**Conductor Size:** 16AWG(19/29)  
**Insulation:** Polyvinyl Chloride  
**Insulation Thickness:** 0.021"(Nom.)  
**Insulation Diameter:** 0.099"(Nom.)  
**Filler:** PP or solid filler as required  
**Separator:** Tissue separator  
**Jacket Material:** Flexible Polyvinyl Chloride  
**Jacket Avg. Thickness:** 0.081"(Nom.)  
**Jacket Color:** Black  
**Overall Diameter:** 0.460"(Nom.)

## PHYSICAL CHARACTERISTICS

**Operating Temperature (°C):** 105°C  
**Flame Test:** UL VW-1

## SAFETY CHARACTERISTICS

RoHS EU Directive 2011/65/EU (1&2)  
REACH Regulation 169 compliant  
California Prop 65 compliant

**Application:** Trailer cables are often used in brake and safety systems - powering tail and brake lights as well as turn signals. Ascent cables are made with flexible polymers insulating jackets that are oil, moisture, and UV resistant.

*All trademarks are property of their respective owners. All specifications are subject to change.*

Revision History		
00	2019/07/26	Initial release
Created L. Jian		Approved A. Huang

**Bristol** | Unit 61, Gazelle Rd., Weston Industrial Estate, Weston-super-Mare, North Somerset BS24 9ES UK  
**Frankfurt** | Rudolf-Braas-Strasse 2, D-61381 Friedrichsdorf  
**Milwaukee** | 5001 South Towne Dr. New Berlin, WI 53151 USA  
**Suzhou** | B2-2 Weiting Town Industrial - Workshop A, No. 9 Weixin Rd., Suzhou Industrial Park, Jiangsu, China 215122

