


28/1pr. + 28/2 USB 2 Cable, Gray



PRODUCT DATA SHEET

Proprietary to Customer.

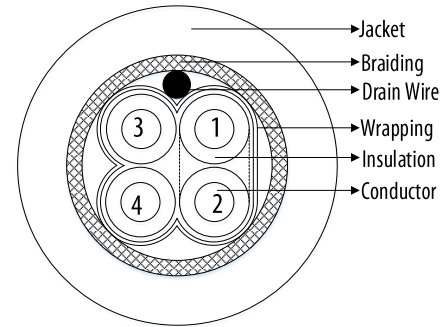

Design Number 10111
Part Number 32109657
Customer Number N/A

Color Code: Twisted Pair: 1. Green 2. White
2 Conductors: 3. Red 4. Black

CONSTRUCTION

Conductor: Stranded tinned copper
Conductor Size: 28AWG(19/40)
Insulation: mPPE
Insulation Avg. Thickness: 0.007"(Nom.)
Insulation Diameter: 0.030"(Nom.)
Assembly Pair: Twist the Green & White conductors
Cable Assembly: Cabling the twisted pair with 2 conductors Red, Black
Wrapping: Al-mylar (Foil facing out)
Drain Wire: 28AWG(7/36), Stranded tinned copper
Braiding: Tinned copper, coverage 75%
Jacket Material: Specially Formulated TPE
Jacket Avg. Thickness: 0.040"(Nom.)
Overall Diameter: 0.190"(Nom.)
Jacket Color: Gray

ELECTRICAL CHARACTERISTICS

Operating Temperature (°C): 105°C
Flame Test : UL VW-1

SAFETY CHARACTERISTICS

RoHS EU Directive 2011/65/EU(1&2)
REACH Regulation 169 compliant
California Prop 65 compliant

Application: Proprietary to Customer

All trademarks are property of their respective owners. All specifications are subject to change.

Revision History		
00	2019/10/21	Initial release
Created L. Jian		Approved A. Huang

Bristol | Unit 61, Gazelle Rd., Weston Industrial Estate, Weston-super-Mare, North Somerset BS24 9ES UK
Frankfurt | Rudolf-Braas-Strasse 2, D-61381 Friedrichsdorf
Milwaukee | 5001 South Towne Dr. New Berlin, WI 53151 USA
Suzhou | B2-2 Weiting Town Industrial - Workshop A, No. 9 Weixin Rd., Suzhou Industrial Park. Jiangsu, China 215122

