


232 Sherman Street Gardner, MA 01440
 Phone: 978-632-0900 Fax: 978-630-1872
 Visit us on our website; www.dataauidecable.com

**8 CONDUCTOR 26 AWG PVC-PVC VW-1 CABLE
 TEMPERATURE RATED -40C TO +105C**

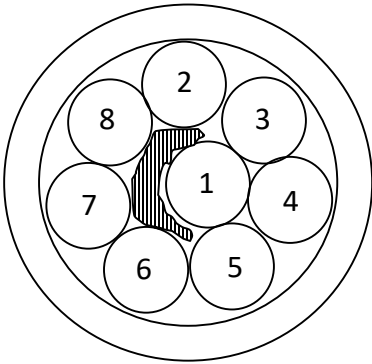

CONDUCTORS
(8 TOTAL):
 - 26 AWG (7x34) Tinned Annealed Copper Insulated with .010" Wall of S-R PVC I/A/W MIL-DTL-16878D TYPE B to a Nominal O.D. of .039" +/- .002"

COLOR CODE:
 - As Indicated

NOTES:
 - 2" Nominal Left-Hand Direction Cable Lay
 - Polypropylene Filler in Core Area
 - Overall Polyester Binder Tape, 25% Lap
 - Overall .028" Nominal Wall Gray Flexible PVC to .190" Nominal O.D.
 - Manufacturer's Identification Thread Pulled Under Jacket

Mechanical/Electrical:
 - Max Operating Voltage: 300Vac (Not Marked)
 - UL Flame Test: VW-1
 - Max Recommended Pulling Tension: 24lbs

COLOR CODE

| CONDUCTOR | COLOR |
|-----------|--------|
| 1 | BLACK |
| 2 | RED |
| 3 | WHITE |
| 4 | GREEN |
| 5 | BROWN |
| 6 | BLUE |
| 7 | ORANGE |
| 8 | YELLOW |

LISTINGS/AGENCY APPROVAL

- RoHS

REVISION HISTORY

| 0 | 7/15/19 | WJD | FIRST ISSUE |
|---|---------|-----|-------------|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

| | |
|------------------|---------|
| Customer Number | |
| D.G. Part Number | 19F28-4 |
| Prepared By: | LLJ |
| Reviewed By: | WJD |

CUSTOMER APPROVAL (AS APPLICABLE)

Title: _____

Date: _____