
Signature:

ate:

Company:

"This is an uncontrolled document once printed"

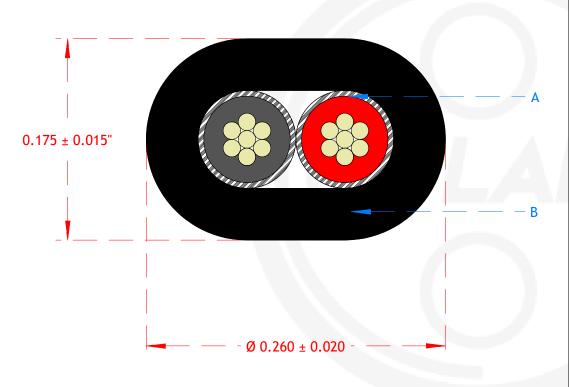

A: 18 AWG 2 Conductors Bare Copper with Polyvinylchloride & Nylon Insulation

Wire Size & Stranding: 18 AWG 7/0.0152 Metal Type: Annealed Bare Copper Nominal Wire Diameter: 0.045

Insulation Type: Polyvinylchloride / Nylon Nominal Insulation Thickness: 0.015 / 0.005 Nominal Conductor Diameter: 0.075 / 0.085

Color Code: Black, Red

B: Black Polyvinylchloride Jacket, Nominal Jacket Thickness: 0.045 Sleeve Extruded, Temperature Rating -40°C to 90°C TC 600V 90C

Legend: LAKE CABLE E208309 18AWG 2C (UL) TC PVC/NYLON 600V 90°C DRY/WET PVC JACKET SUN RES DIR BUR FT4 "ROHS COMPLIANT" MADE IN USA

Notes:

Print Type: Inkjet Footage Markers: Yes Ripcord: Yes (1-Ply) Weight: 36 Lbs/Mft

Standards

- Refer to NEC (NFPA 70) article 1277 for installation guidelines
- Cable is suitable for use in Class I Division 2 hazardous locations
- UL listed as Type TC per UL Standard 1277 for tray cables
- UL approved for Direct Burial and Sunlight Resistant applications
- Cable meets UL 1581 & 1202 (FT-4) 70,000 BTU/HR & ICEA T-29-520 210,000 BTU/HR requirements
- Meets ICEA S-73-532, where applicable
- Cable is RoHS III compliant per Directive 2015/863/EU
- Cable is REACH compliant per Regulation (EC) No 1907/2006 Updated July, 7 2017
- Made in the USA



12 AWG 2C PVC/NYLON O/A PVC JACKET TC 600V 90C

All Dimensions are Shown In Inches

Third Angle Projection Third Angle Projection Third Angle Projection To AND ACCEPTANCE OF THE FORECOME.

Drawn By: AJ Scale: 12: 1 Cust. #: -

Reviewed By: - Sheet: 1 of 1 Lake's #: V182-FLAT

Cage Code: N/A Date Created: 11/12/2018

ATION S. F. LLC.

EV
A
A
First time run for Production
AJ
11/13/2018
Revision
Description
Approved By
Date