


20/3C, XLPE/PVC Cable



PRODUCT DATA SHEET

Marine wire with SAE thin-wall primary conductors suitable for 60 volt continuous use.

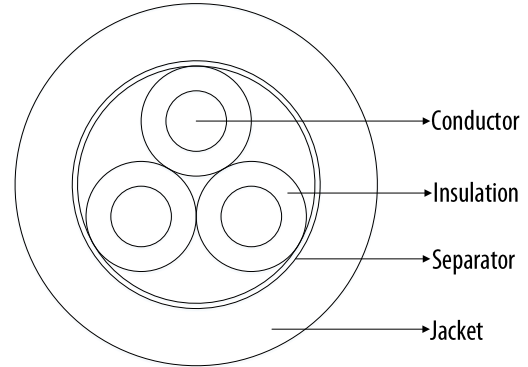

Design Number 10120
Part Number 32110325
Customer Number N/A

Color Code: Yellow, Green, Orange

CONSTRUCTION

Conductor: Stranded tinned copper
Conductor Size: 20AWG(7/28)
Insulation: Cross-linked Polyethylene
Insulation Thickness: 0.016"(Nom.)
Insulation Diameter: 0.07"(Nom.)
Separator: Non-Woven Polyester
Jacket Material: Flexible Polyvinyl Chloride
Jacket Avg. Thickness: 0.03"(Nom.)
Jacket Color: Black or Gray
Overall Diameter: 0.214"(Nom.)
Print Legend:
MM TXL 20 GA MARINE WIRE SAE J1128 60V DC 105C

PHYSICAL CHARACTERISTICS

Operating Temperature (°C): 105°C
Operating Voltage: 60V DC
Flame Test: UL VW-1

SAFETY CHARACTERISTICS

RoHS EU Directive 2011/65/EU (1&2)
REACH Regulation 169 compliant
California Prop 65 compliant
The inner cores are compliant with SAE J-1128 TXL

Jacket Color: black, with part number 32110325

Application: Marine wire with thin-wall high-temp insulation suitable for control and power circuits in wet environments

All trademarks are property of their respective owners. All specifications are subject to change.

Revision History		
00	2019/08/02	Initial release
01	2019/08/07	Add part number and update printing to 20 GA
Created L. Jian	Approved A. Huang	

Bristol | Unit 61, Gazelle Rd., Weston Industrial Estate, Weston-super-Mare, North Somerset BS24 9ES UK
Frankfurt | Rudolf-Braas-Strasse 2, D-61381 Friedrichsdorf
Milwaukee | 5001 South Towne Dr. New Berlin, WI 53151 USA
Suzhou | B2-2 Weiting Town Industrial - Workshop A, No. 9 Weixin Rd., Suzhou Industrial Park. Jiangsu, China 215122

