



Coast™ Custom Cable

Tel: (908) 925-8000 E-mail: coast@alphawire.com
Distributor Name: **IEWC**
End Use Customer: **Cobo**
IP Owner: **Cobo**

Part Number: **19-2155 WH199**

Revision: **None**

Customer P/N: **N/A**
Customer Revision: **N/A**

Cable Specification

4/C 20 AWG Unshielded Cable

CONDUCTORS


Wire Size & Type: 20 AWG (19X32) Tinned Copper
Nom. Wire Diameter: 0.040
Insulation Type: ETFE
Nom. Ins Thickness: 0.006
Conductor Diameter: **0.052**
Tolerance (+/-): 0.003
Colors: Black
Red
Green
Grey

ASSEMBLY

Core Cabling: 4 Conductors Cabled
Nom. Diameter: **0.126**
Filler: None
Binder: None
Drain: None
Shield: None

JACKET

Material Type: White ETFE
Separator: None
Nom. Jkt Thickness: 0.010
Cable Diameter: **0.146**
Tolerance (+/-): 0.006
Print: None
Other: Jacket will appear convoluted

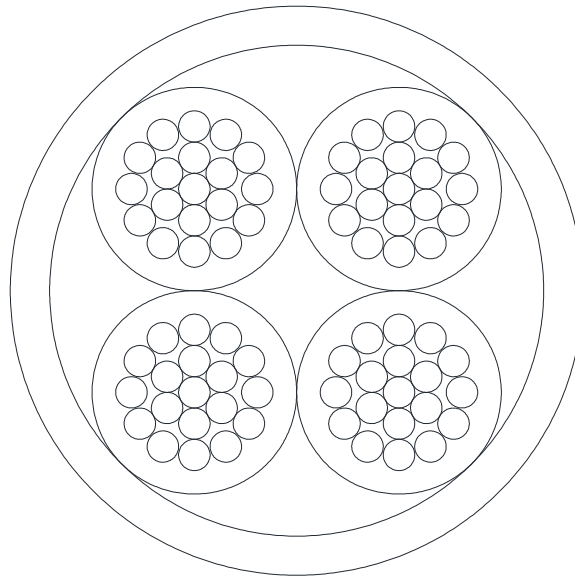

TESTS

Test 1: Continuity
Test 2: Shorts
Test 3: Physical/Dimensional

MISCELLANEOUS

Voltage: 250V
Temperature: -55°C to +150°C
Put Ups: Bulk, May Contain Multiple Lengths Per Reel
Reel: Wood or Plastic
Colors: Munsell® Wire & Cable Limits of Deviation

ENVIRONMENTAL COMPLIANCE

RoHS: European Directive 2011/65/EU (ROHS2) and amending Directive 2015/863/EU

APPROVALS

Final Product: None

Note: Cable drawing is representative only and may not match the specific configuration of the final product.

Dimensions in inches unless otherwise specified

Prepared By: Jason Kovaric

Date: 8/2/2019

Customer Approval:

Title: _____

Date: _____

PROPRIETARY NOTICE

This document and any other data disclosed herein is the sole property of Alpha Wire and may not be reproduced, used or disclosed in part or in whole without the written consent of Alpha Wire. Please note that Alpha Wire does not warrant the specifications or designs developed with regard to Form, Fit, or Functionality for any specific end use application, and that the suitability of such and any future liability associated with the manufactured items is the sole responsibility of the end user.