


REV	ECN #	DATE	DESCRIPTION	APP'D
A	---	3/30/00	ISSUE TO PRODUCTION	(K)
B	---	10/31/02	UPDATED, ADDED LEADWIRE NUMBERS	(K)

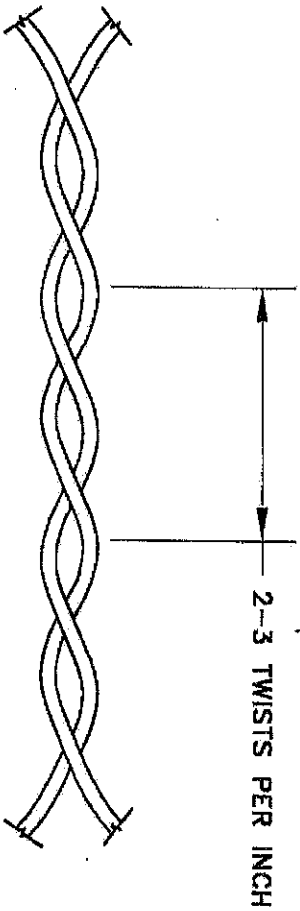

1. 2 TWISTED LEADWIRES: 02-246-26-01 (BLACK)
02-246-26-03 (RED)

2. SEE WIRE SPEC 02-246-26-XX FOR DETAILS

CURRENT CONTROLS, INC.		353 SOUTH BROOKLYN AVE. WELLSVILLE, NY 14895	
SCALE:	NTS	DRAWN BY:	EJS
DO NOT SCALE THIS DRAWING		APPROVED BY:	<i>K. Robinson</i>
USED ON:	981105	DATE:	3/30/00
DRAWING TITLE:		DATE: 3/30/00	
TWISTED LEADWIRE		DRAWING NUMBER:	
2 PLACE DECIMAL: ±.01		02-218-01	
3 PLACE DECIMAL: ±.005			

REV	DATE	DESCRIPTION	APP'D
A	10/02	ISSUE TO PRODUCTION	(Signature)
B			
C			

LEADWIRE:

- MIL-W-22759/32-26
 - CHEMICALLY ETCHED
 - 26 AWG (19 x 38 GA STRANDING)
 - CROSS-LINKED MODIFIED ETFE INSULATION (TEFZEL)
 - 150° C RATED
 - 600 V
 - DIAMETER OF STRANDED CONDUCTOR (.018 MIN - .020 MAX)
 - TIN-COATED COPPER CONDUCTOR
 - COLOR: DETERMINED BY THE LAST 2 DIGITS OF WIRE NUMBER, EX. 02-246-26-XX
- SEE CHART BELOW

#	COLOR
01	BLACK
03	RED
04	ORANGE
05	YELLOW
06	GREEN
07	BLUE
11	WHITE

CURRENT CONTROLS, INC.		353 SOUTH BROOKLYN AVE. WILLSVILLE, NY 14895	
SCALE: NTS	DRAWN BY: EJS	DATE: 10/30/02	
DO NOT SCALE THIS DRAWING	APPROVED BY: <i>R. Pedersen</i>	DATE: 11-5-02	
USED ON:	DRAWING TITLE: LEADWIRE		
2 PLACE DECIMAL: ±.01	DRAWING NUMBER: 02-246-26-XX		
3 PLACE DECIMAL: ±.005			