## NOTES: UNLESS OTHERWISE SPECIFIED

- WIRE SHALL BE 26 AWG, STRANDED, TIN COATED COPPER, CROSSLINKED MODIFIED ETFE INSULATION, IAW AS22759/32
- 2. ETCHING REQUIREMENT: REMOVE 2 FEET MINIMUM FROM ORIGINAL WIRE AFTER ETCHING TO PREVENT ETCHANT FROM WICKING ONTO CONDUCTOR. WIRE COLOR MAY BE AFFECTED BY ETCHING PER ARP-6167.

	Δ	
	3	/
_		_

WIRE COLORS SHALL BE BLUE, WHITE, AND RED



WIRES SHALL BE TWISTED 3 ±1 TWISTS PER INCH



STRIPPED WIRE ENDS SHALL BE TINNED PER J-STD-001 USING Sn95Ag5 SOLDER

CHANGE HISTORY							
REV	DESCRIPTION	DATE	DRAWN	APPROVED			
Α	ECN 6359	5/14/19	BSJ				

TWISTED TRIPLE WIRE, 26 AWG, AS22759/32

7040-5284

SHEET 1 OF 1


DWG. NO.

CAGE CODE

5W885

## CONTROLLED DOCUMENT

BEFORE MAKING ANY CHANGES, COMPLIANCE WITH ENGINEERING CONFIGURATION CONTROL IS REQUIRED

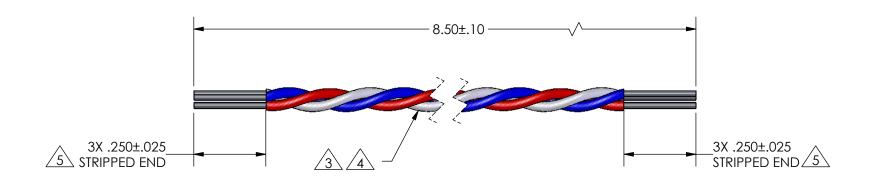

EAR CONTROL  TECHNICAL INFORMATION SUBJECT TO EXPORT ADMINISTRATION REGULATIONS (EAR). THIS TECHNICAL INFORMATION IS PROHIBITED.	DIMENSIONS ARE IN INCHES TOLERANCES ANGULAR ±2°		NAME	DATE	
		DRAWN	B. ST JACQUES	5/14/19	
		CHECKED	СВ	XX/XX/XX	
FROM TRANSFER OR DISCLOSURE IN ANY MANNER TO NON-U.S. PERSONS IN THE UNITED	TWO PLACE DECIMAL ±.01	ENG APPR.	E. LENCIONI	XX/XX/XX	
STATES OR ABROAD WITHOUT PRIOR APPROVAL BY THE U.S. COMMERCE DEPARTMENT OR APPLICABLE EAR EXEMPTION.	THREE PLACE DECIMAL ±.005 FOUR PLACE DECIMAL ±.0005	MFG APPR.			
		Q.A.			
PROPRIETARY AND CONFIDENTIAL	MATERIAL NOTED				
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF TE CONNECTIVITY, ANY	FINISH NOTED				
REPRODUCTION IN PART OR AS A	DO NOT SCALE DRAWING				
WHOLE WITHOUT THE WRITTEN PERMISSION OF TE CONNECTIVITY IS	Information in this box is for Engineering Reference Only				
PROHIBITED.					Г