


### 02YSY(ST)CY 1X2X0.64/2.55-150 VI KF40 FR ES

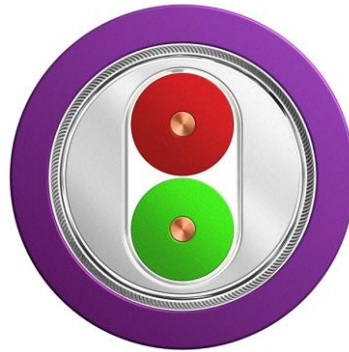

#### Design

##### Wire

Bare copper wire

∅ 0.65 mm

Insulation of foamed Polyethylene (PE) with skin

∅ 2.55 mm

##### Core:

2 wires RD and GN twisted to a pair

Plastic tape, overlapped

Inner-Jacket Polyvinylchloride (PVC)

∅ 5.4 mm

Alulaminat foil overlapped, applied longitudinally

Shield braiding of tinned copper wires

Coverage about 55%

∅ 6.2 mm

##### Jacket:

Polyvinylchloride (PVC) VT

∅ (8.0 ±0.4) mm

Printing: "sequential length in metres" LEONI L PROFIBUS L2/F.I.P. ES L45467-G16-C185 \* 22AWG (SHIELDED) (UL) E119100 CMG FT4 75°C or CL3 SUN RES or AWM 21694 600V

Textintervals about 1000 mm

#### Electrical data at 20°C

Loop resistance

≤ 110 Ohm/km

Screen resistance

≤ 9.5 Ohm/km

Insulation resistance

≥ 16 GOhm\*km

Characteristic impedance (3 - 20 MHz)

150 ± 15 Ohm

(31,25 - 38,4 KHz)

185 ± 18.5 Ohm

(9,6 KHz)

270 ± 27 Ohm

Frequency (KHz)	9,6	38,4	4000	16000
Attenuation max. (dB/km)	2,5	4	22	42

## LEONI Special Cables GmbH

Technisches Datenblatt – Technical Data Sheet – Technisches Datenblatt – Technical Data Sheet – Technisches Datenblatt – Technical Data Sheet

Inductance (31,25 KHz)	≈	900	μH/km
L / R ratio	≤	15	μH/Ω
Capacitance (1 KHz)	≈	28,5	nF/km
Unbalance to ground	≤	1500	pF/km
Surface transfer impedance (20 MHz)	≤	5	mOhm/m
Operating voltage (effective value)	≤	100	V
UL-Rating		600	V
rel. velocity of propagation	≈	81	%
Test voltage (DC 3 sec)	=	3600	V

### Mechanical and thermal characteristics

Conductor material acc. to DIN EN 13602 Cu-ETP-A...  
 Screen material acc. to DIN EN 13602 Cu-ETP-A...-B  
 Insulating material acc. to DIN EN 50290-2-23 (VDE 0819), table 2/A (HD 624.3)  
 Jacket material acc. to DIN EN 50290-2-22 (VDE 0819), compoundtype TM52 (HD 624.2)  
 Cold bend test acc. DIN VDE 0473 part 811-1-4 ; after 16 hour storage at -40° Grad  
 Flame retardant acc. to IEC 60332-3-24 (Cat. C)  
 Flame retardant acc. to UL 1685 (CSA FT 4)

FILE E119100 Vol.1 Sec.16 Page 7 CMG  
 FILE E116441 Vol.1 Sec.6 Page 7 CL3, PLTC  
 UL-Style 21694

### Other characteristics:

RoHS compliant (Directive 2011/65/EC)  
 Sunlight resistant acc. to UL 1581 Sec.1200

Permissible temperature range: - 40°C up to + 80°C  
 Bending diameter ≥ 150 mm  
 Pulling force with ≤ 100 N

PVC weight with Phthalate : 47.7 Kg/km  
 PVC weight without Phthalate : 0.0 Kg/km  
 Weight about : 80 kg/km (53 lb/1000ft)

### Designation of order:

L45467-G16-C185  
 202226  
 02YSY(ST)CY 1X2X0.64/2.55-150 VI KF40 FR  
 1000 m on non-returnable reel