


# 20/2C, PVC/PVC Cable



PRODUCT DATA SHEET

Electronic control cable with flexible strand, UV protection, oil protection, flame retardant jacket.

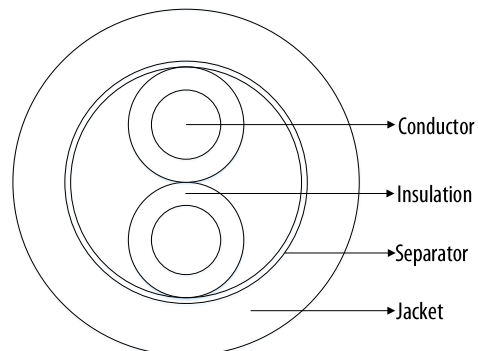

**Design Number** 10145  
**Part Number** 32112629  
**Customer Number** N/A

**Color Code:** 1. Red 2. Black

## CONSTRUCTION

**Conductor:** Stranded bare copper  
**Conductor Size:** 20AWG(26/34)  
**Insulation:** Polyvinyl Chloride  
**Insulation Thickness:** 0.0145"(Nom.)  
**Insulation Diameter:** 0.066"(Nom.)  
**Separator:** Clear Mylar Tape  
**Jacket Material:** Flexible Polyvinyl Chloride  
**Jacket Avg. Thickness:** 0.03"(Nom.)  
**Overall Diameter:** 0.195"(Nom.)  
**Jacket Color:** Black

## PHYSICAL CHARACTERISTICS

**Operating Temperature (°C):** - 40°C to +80°C  
**Flame Test:** UL VW-1

## SAFETY CHARACTERISTICS

RoHS EU Directive 2011/65/EU (1&2)  
REACH Regulation 169 compliant  
California Prop 65 compliant

**Application:** Electronic control suitable for controls, displays, sensors, and communication. Flexible construction allows us in cramped spaces

*All trademarks are property of their respective owners. All specifications are subject to change.*

Revision History		
00	2019/09/24	Initial release
Created L. Jian	Approved A. Huang	

**Bristol** | Unit 61, Gazelle Rd., Weston Industrial Estate, Weston-super-Mare, North Somerset BS24 9ES UK  
**Frankfurt** | Rudolf-Braas-Strasse 2, D-61381 Friedrichsdorf  
**Milwaukee** | 5001 South Towne Dr. New Berlin, WI 53151 USA  
**Suzhou** | B2-2 Weiting Town Industrial - Workshop A, No. 9 Weixin Rd., Suzhou Industrial Park, Jiangsu, China 215122

