


UL 1213 – 26AWG Teflon PTFE Wire



PRODUCT DATA SHEET

Internal wiring of appliances where exposed to oil at temperature not exceeding 60C.

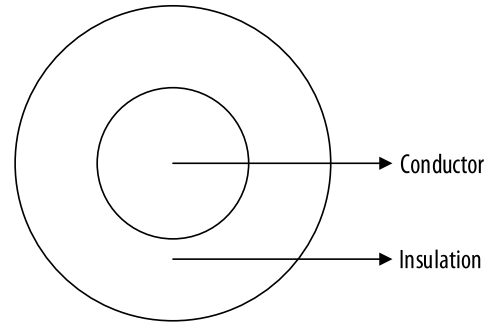

Design Number 10223
Part Number Table 1
Customer Number N/A

CONSTRUCTION

Conductor: Stranded silver plated copper
Conductor Size: 26AWG(7/34)
Conductor Diameter: 0.019”(Nom.)
Insulation Material: Extruded Polytetrafluoroethylene (PTFE)
Avg. Thickness: 0.010”(Nom.)
Insulated Diameter: 0.039”(Nom.)
Insulation Color: A variety of colors available

ELECTRICAL CHARACTERISTICS

Operating Temperature (°C): 105°C by UL
Operating Voltage: Not specified by UL
Conductor Resistance@20°C: 150 Ω/km Max
Dielectric Test: AC 1.0 kV/1 min

SAFETY CHARACTERISTICS

RoHS Compliance: European Directive 2015/863/EU
Reference Standards: UL 758, UL 1581, and Style Page UL 1213
Approvals: AWM UL 1213

Table 1

Part Number	Insulation Color
32113035	Black
32115882	Red
32119530	Violet
32147783	White

Revision History		
00	2020/02/25	Initial release
01	2022/02/24	Part number of white color added
Created L. Jian	Approved A. Huang	

Application: Common applications include military harnessing power supply lead time, appliance wiring, and medical electronics.

All trademarks are property of their respective owners. All specifications are subject to change.

UK HQ | Unit 11, Humphrys Road, Woodside Industrial Estate, Dunstable, LU5 4TP UK
Frankfurt | Rudolf-Braas-Strasse 2, D-61381 Friedrichsdorf
Milwaukee | 5001 South Towne Dr. New Berlin, WI 53151 USA
Suzhou | B2-2 Weiting Town Industrial - Workshop A, No. 9 Weixin Rd., Suzhou Industrial Park, Jiangsu, China 215122

