



DESC: 20/4 ITC/AWM 2517 105°C 300V

DWG NO: FITC204-01D

SCALE: 25x

DATE: 10/14/07

DR. BY: DPL

NWI P/N: FITC204-01D


ITEM	SPECS.
A.	20 GAUGE 7x.0121TC CONCENTRIC O.D. .0363±.001"
B.	9 MILS SR-PVC INSULATION PER UL AWM 10002 8 MILS MIN. SEMI-RIGID PVC INSULATION O.D. .059±.002"
C.	TISSUE PAPER SEPARATOR
D.	35 MILS PRESSURED PVC JACKET 105°C 300V 30 MILS MIN. PVC JACKET BLACK JACKET UL AND CSA APPROVED

NORTHWIRE RESTRICTED

This document contains Northwire, Inc. proprietary data, and is not to be copied, reproduced, used or divulged to unauthorized persons, in whole or in part, without proper authorization in writing from Northwire, Inc. This information is the property of Northwire, Inc. which reserves all rights to it.

CUSTOMER: NWI DISTRIBUTION

CUSTOMER P/N:

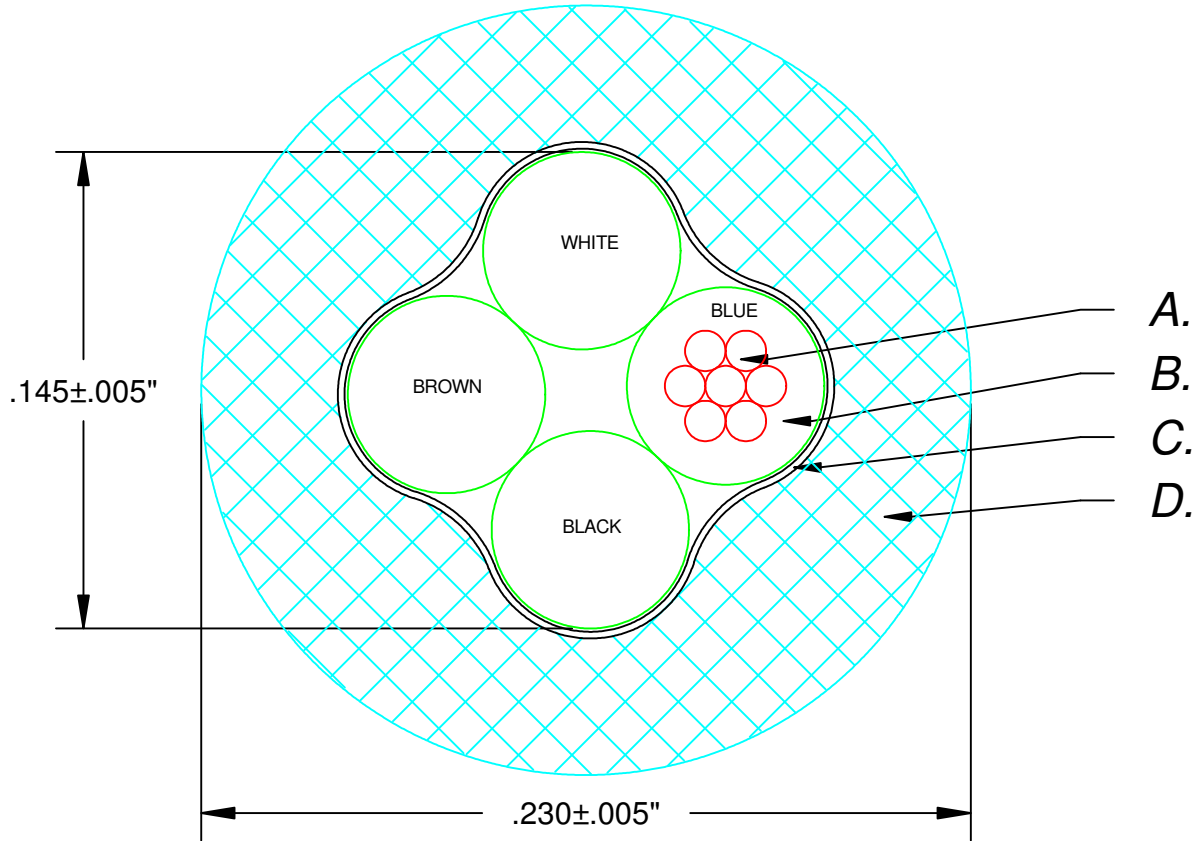

ELECTRICAL REQUIREMENTS:

DIELECTRIC WITHSTAND VOLTAGE: 1.5 KVAC

MECHANICAL REQUIREMENTS:

NONE SPECIFIED

CORE DIMENSIONS FOR INTERNAL USE ONLY

CHANGED CONDUCTOR COLORS	B 11/15/07	DPL			
INITIAL RELEASE		A	10/14/07	DPL	
REVISION RECORD	REV	REV DATE	APR 1 APR 2	QA R	