



Manufactured By:
 134 Ferry St.
 South Grafton, Ma 01560
 www.huesonwire.com

Issue Date: 10/22/2019

Issue: 1

Construction

Description: 3/C 20 7/28 TC PE/PVC O/A AMS + Drain		Diam. (In)
Component:	3 Conductors	
Conductor:	20 AWG 7/28 Tinned Copper to ASTM B-8	0.038"
Insulation:	0.015" Low Density Polyethylene 0.068" +/- .003"	0.068"
Color Code:	Black, Red, Clear	0.068"
Cable Assembly:	Bunch Cable 3 Conductors	0.146"
Drain Wire:	20 7/28 TC	0.146"
Shield:	Aluminum Mylar Tape	0.150"
Jacket:	0.028" Flexible PVC, Oil, Moisture UV Resistant, VW-1	0.205"
Jacket Color:	TBD 0.205" +/- 0.005"	0.205"

Print:

Specifications:	<u>AWM Style</u>	<u>Temp</u>	<u>Voltage</u>	<u>Flame</u>	
UL	AWM-2093	60°C	300	FT-1	
Canadian cRU	AWM	80°C	300	FT-1	I/II A/B

Environmental Compliance

- RoHS EU Directive 2011/65/EU (1&2)
- REACH Regulation 169:
- California Prop 65:

IQ-190477




Manufactured By:

Issue Date: 10/22/2019

Issue: 1

Drawing/Rotation:

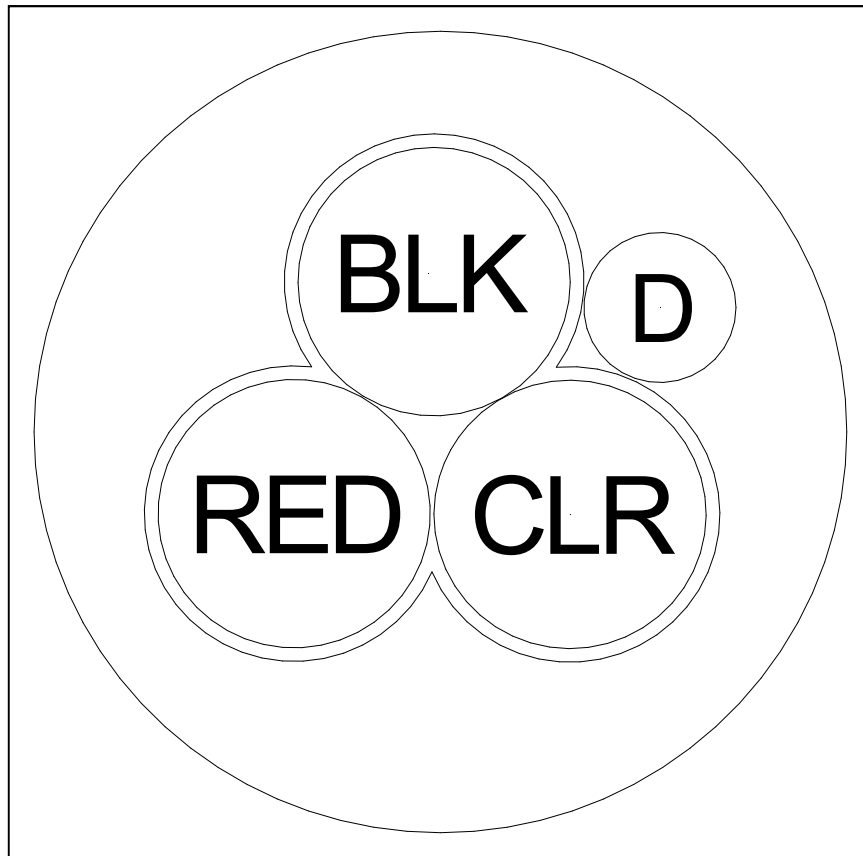

IQ-190477