

YOUR SIGNATURE CONSTITUTES THAT YOU HAVE READ AND AGREED TO THIS SPECIFICATION SHEET AND UPON CONFIRMATION OF YOUR ORDER; THIS ITEM MAY BE NON-CANCELABLE AND NON-RETURNABLE.

Signature:

Date:


Company:

"This is an uncontrolled document once printed"



Note:

Note: All conductors must be inkjet printed with number at 1/2" intervals

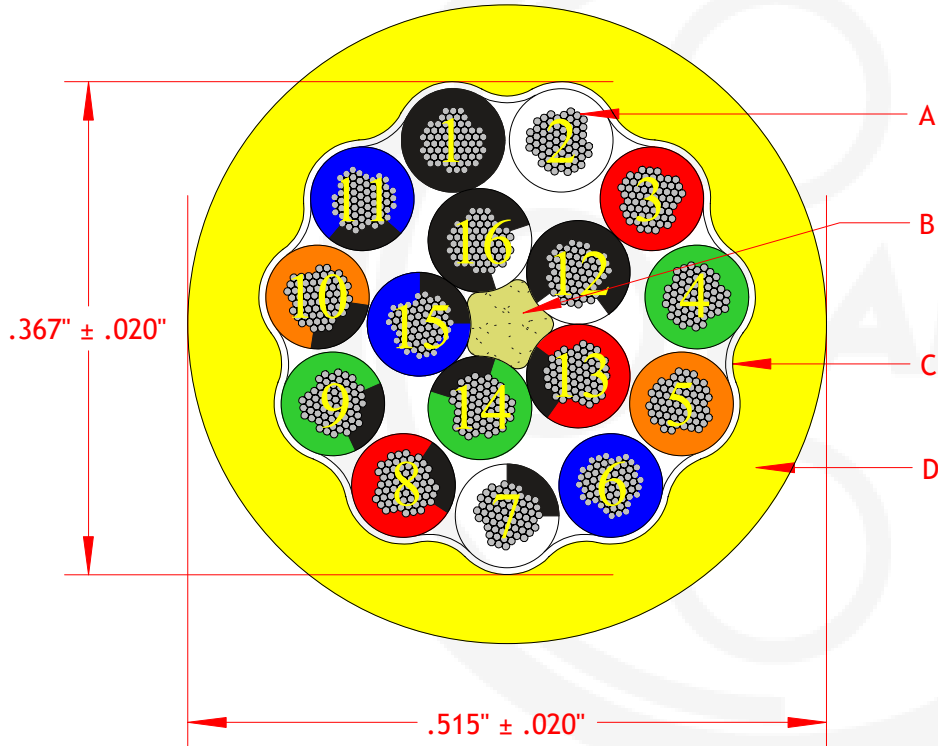

A: 18 AWG 16 Conductors 41 Strands Tinned Copper Wire with TPE-S Insulation

Size & Stranding: 18 AWG 41/34
Metal Type: Annealed Tinned Copper
Nominal Wire Diameter: 0.046

Insulation: Thermoplastic Polyester Elastomer
Nominal Thickness: 0.015
Nominal Conductor Diameter: 0.076
Color Code: See Table I

B: Filler

C: Spun Bonded Nylon Tape Binder - 100% Coverage

D: Pressure Extruded TPE Jacket,
Nominal Jacket Thickness: 0.075
Jacket Color: Yellow

Legend: E206787 18AWG 16C RU AWM 21002 105C 600V OR CSA AWM I/II A/B
105C 600V FT1 "ROHS COMPLIANT" MADE IN USA

Notes:

- * Type of Print: Inkjet Print
- * Footage Markers: N/A
- * Ripcord: N/A
- * Convolution Standard: Level 2 or Better

Table I

No. of Cond	Base Color	Stripe Color	Marking
1	Black	-	1-ONE
2	White	-	2-TWO
3	Red	-	3-THREE
4	Green	-	4-FOUR
5	Orange	-	5-FIVE
6	Blue	-	6-SIX
7	White	Black	7-SEVEN
8	Red	Black	8-EIGHT
9	Green	Black	9-NINE
10	Orange	Black	10-TEN
11	Blue	Black	11-ELEVEN
12	Black	White	12-TWELVE
13	Red	Black	13-THIRTEEN
14	Green	Black	14-FOURTEEN
15	Blue	Black	15-FIFTEEN
16	Black	White	16-SIXTEEN



18AWG/16C 41XTC TPE YELLOW
UL/CSA 105C 600V

All Dimensions are Shown In Inches

PROPRIETARY DOCUMENT

THIS DRAWING MAY CONTAIN PATENTED OR PROPRIETARY INFORMATION AND MUST NOT BE REPRODUCED, DISTRIBUTED OR USED FOR MANUFACTURING WITHOUT THE WRITTEN CONSENT OF LAKE CABLE, LLC. ACCEPTANCE OF THIS DRAWING WILL BE CONSTRUED AS AN AGREEMENT TO AND ACCEPTANCE OF THE FOREGOING.

Third Angle Projection

Drawn By: MZ

Scale: 6 : 1

Cust. #: -

REV -

Reviewed By: -

Sheet: 1 of 1

Lake's #: C1816TFLEX-04

REV P1

Cage Code: N/A

Date Created: 06/20/19

P1

Revision

Description

Approved By

MZ

Date

06/20/19