


UL 1213 – 26AWG Teflon PTFE Wire



PRODUCT DATA SHEET

Internal wiring of appliances where exposed to oil at temperature not exceeding 60C.

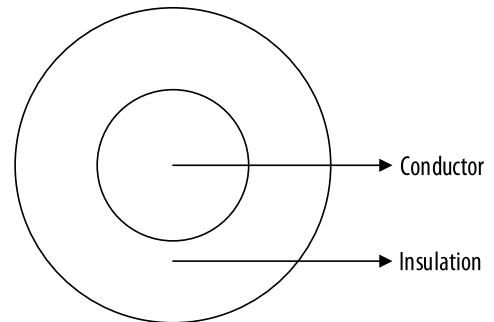

Design Number 10223
Part Number Table 1
Customer Number N/A

CONSTRUCTION

Conductor: Stranded silver plated copper
Conductor Size: 26AWG(7/34)
Conductor Diameter: 0.019”(Nom.)
Insulation Material: Extruded Polytetrafluoroethylene (PTFE)
Avg. Thickness: 0.010”(Nom.)
Insulated Diameter: 0.039”(Nom.)
Insulation Color: A variety of colors available

ELECTRICAL CHARACTERISTICS

Operating Temperature (°C): 105°C by UL
Operating Voltage: Not specified by UL
Conductor Resistance@20°C: 150 Ω/km Max
Dielectric Test: AC 1.0 kV/1 min

SAFETY CHARACTERISTICS

RoHS Compliance: European Directive 2015/863/EU
Reference Standards: UL 758, UL 1581, and Style Page UL 1213
Approvals: AWM UL 1213

Table 1

Part Number	Insulation Color
32113035	Black
32115882	Red
32119530	Violet

Application: Common applications include military harnessing power supply lead time, appliance wiring, and medical electronics.

All trademarks are property of their respective owners. All specifications are subject to change.

Revision History		
00	2020/02/25	Initial release
Created L. Jian	Approved A. Huang	

Bristol | Unit 61, Gazelle Rd., Weston Industrial Estate, Weston-super-Mare, North Somerset BS24 9ES UK
Frankfurt | Rudolf-Braas-Strasse 2, D-61381 Friedrichsdorf
Milwaukee | 5001 South Towne Dr. New Berlin, WI 53151 USA
Suzhou | B2-2 Weiting Town Industrial - Workshop A, No. 9 Weixin Rd., Suzhou Industrial Park. Jiangsu, China 215122

