

**1102820/10RB - X**

**Conductors:** 20AWG 10/30 Regular Bunch Tinned Copper  
per ASTM B-174

**Strand Diameter:** .0100"

**Conductor Diameter:** 0.041" Nominal O.D. 3.09 lbs per mft

**Insulation:** mPPE Insulation

**Thickness:** .0095" Nominal


**Diameter:** .055" ± .003"

**Put-up:** 10,000' Wood Spool

**Print Legend:**

E477982-UH RU AWM STYLE 11028 105C 600V VW1  
cRU AWM I A/B 105C 600V FT1 --

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

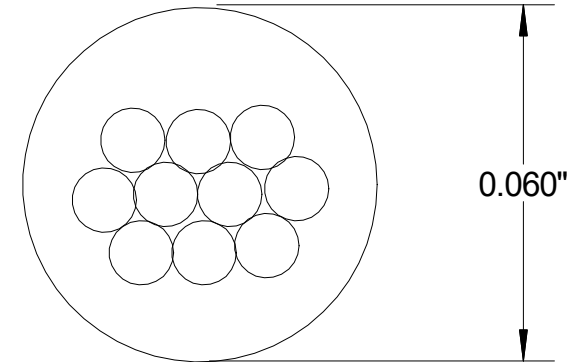

*Product Specification*

Drawn By:	Product Description	REV
<b>Kevin Deslaurier</b>	20 AWG 10/30 Regular Bunch Tinned Copper	<b>0</b>
Date: Oct 28, 2019	Drawing No. 1102820/10RB	