


# UL 1213 – 26AWG Teflon PTFE Wire



PRODUCT DATA SHEET

Internal wiring of appliances where exposed to oil at temperature not exceeding 60C.

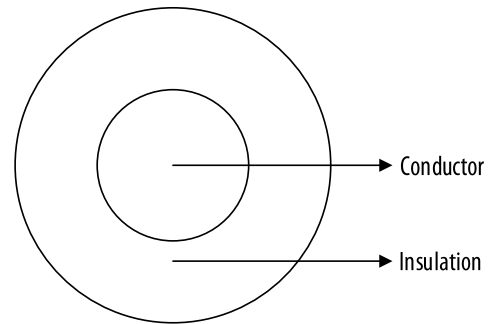

**Design Number** 10223  
**Part Number** Table 1  
**Customer Number** N/A

## CONSTRUCTION

**Conductor:** Stranded silver plated copper  
**Conductor Size:** 26AWG(7/34)  
**Conductor Diameter:** 0.019”(Nom.)  
**Insulation Material:** Extruded Polytetrafluoroethylene (PTFE)  
**Avg. Thickness:** 0.010”(Nom.)  
**Insulated Diameter:** 0.039”(Nom.)  
**Insulation Color:** A variety of colors available

## ELECTRICAL CHARACTERISTICS

**Operating Temperature (°C):** 105°C by UL  
**Operating Voltage:** Not specified by UL  
**Conductor Resistance@20°C:** 150 Ω/km Max  
**Dielectric Test:** AC 1.0 kV/1 min

## SAFETY CHARACTERISTICS

**RoHS Compliance:** European Directive 2015/863/EU  
**Reference Standards:** UL 758, UL 1581, and Style Page UL 1213  
**Approvals:** AWM UL 1213

Table 1

Part Number	Insulation Color
32113035	Black
32115882	Red
32119530	Violet

**Application:** Common applications include military harnessing power supply lead time, appliance wiring, and medical electronics.

*All trademarks are property of their respective owners. All specifications are subject to change.*

Revision History		
00	2020/02/25	Initial release
Created L. Jian	Approved A. Huang	

**Bristol** | Unit 61, Gazelle Rd., Weston Industrial Estate, Weston-super-Mare, North Somerset BS24 9ES UK  
**Frankfurt** | Rudolf-Braas-Strasse 2, D-61381 Friedrichsdorf  
**Milwaukee** | 5001 South Towne Dr. New Berlin, WI 53151 USA  
**Suzhou** | B2-2 Weiting Town Industrial - Workshop A, No. 9 Weixin Rd., Suzhou Industrial Park. Jiangsu, China 215122

