All rights reserved. Passing on and copying of this document, use and communication of its contents not permitted without written authorization of LEMO
未经书面同意，不得擅自复制或发布

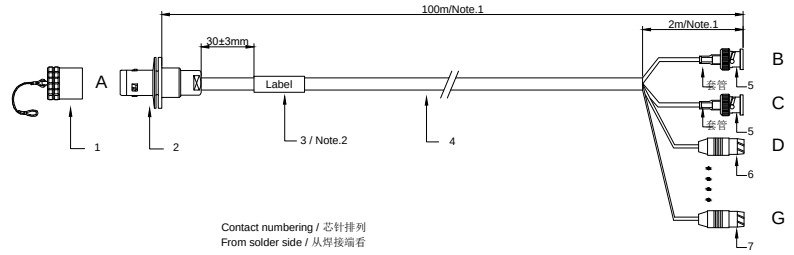

Contact numbering / 芯针排列
From solder side / 从焊接端看

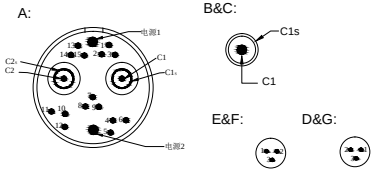

Requirement/技术要求:

① 装配参照K系列&BNC加工指导
② LEMO标准线缆组件测试
③ PE袋包装

Note/注

1. Tolerance on length
   长度公差
   ±20mm up to 0.95m
   0.95m以内 ±20mm
   ±2% from 1.0m
   超过1m ±2%

2. Label/标签
   LM.SA700.A
   Work.No.

Item	Part No.	Qty	Description
7	LB.XLRFS.0001	2'	卡侬母头
6	LB.CNN03.0002	2'	卡侬公头
5	LB.BNCMS.7506	2'	BNC公头
4	KC.CABLE.0001	100M	客户线缆(Belden 9171)
3	LD.LABEL.0004	1'	标签
2	FXG.5K.877.CLA5	1'	LEMO 插头
1	BFG.5K.100.NAS	1'	LEMO 防尘帽

TITLE 线缆组件	SCALE ——	Draw.	Bruce	8.Jan.2020
		Appr.	Leo	8.Jan.2020
		Rev.	1.0	8.Jan.2020
Cus. DWG: ——	HD-装配			
LEMO Electronics (Shanghai) Co., Ltd. Tel: (+86 21) 58997721 www.lemo-china.com	SHEET 1/2	DWG NO. LM.SA947.A		

All rights reserved. Passing on and copying of this document, use and communication of its contents not permitted without written authorization of LEMO
未经书面同意，不得擅自复制或发布

Connection Designation / 接线表

连接器	点位	线色	点位	连接器
A(5K.877)	C1	同轴1芯	C1	B(BNC)
	C1s	同轴1网	C1s	
	C2	同轴2芯	C2	C(BNC)
	C2s	同轴2网	C2s	
	1	地线	1	D(卡侬头母头)
	2	黄	2	
	3	黑	3	
	4	地线	1	E(卡侬头公头)
	5	红	2	
	6	黑	3	
	7	地线	1	F(卡侬头公头)
	8	白	2	
	9	黑	3	
	13	地线	1	G(卡侬头母头)
	14	绿	2	
	15	黑	3	
	电源1	紫		
	电源2	橙		
	壳	屏蔽网		

TITLE 线缆组件	SCALE ——	Draw.	Bruce	8.Jan.2020
		Appr.	Leo	8.Jan.2020
		Rev.	1.0	8.Jan.2020
Cus. DWG: ——	HD-装配			
LEMO Electronics (Shanghai) Co., Ltd. Tel: (+86 21) 58997721 www.lemo-china.com	SHEET 2/2	DWG NO. LM.SA947.A		