



Manufactured By:
 134 Ferry St.
 South Grafton, Ma 01560
 www.huesonwire.com

Issue Date: 1/16/2020

Construction

Issue: 1

Description: 5/C 16 19/.0117 TC XLP/PVC		Diam. (In)
Component:	5 Conductors	
Conductor:	16 AWG 19/.0117" Tinned Copper to ASTM B-8	0.057"
Insulation:	0.023" XLPE to SAE J-1128 0.103" +/- .003"	0.103"
Color Code:	Black, Brown, Green, White, Blue	0.103"
Cable Assembly:	Bunch Cable 5 Conductors	0.278"
Fillers	Fibrillated polypropylene or solid fillers for roundness (optional)	0.278"
Jacket:	0.035" Flexible PVC, Oil, Moisture UV Resistant, VW-1	0.348"
Jacket Color:	Gray 0.348" +/- 0.010"	0.348"
Print:	TBD	
Specifications:	<u>AWM Style</u> <u>Temp</u> <u>Voltage</u> <u>Flame</u> UL Canadian cRU	
Environmental Compliance	<ul style="list-style-type: none"> RoHS EU Directive 2011/65/EU (1&2&3) REACH Regulation 201: California Prop 65: 	


IQ-20021



Manufactured By:

Issue Date: 1/16/2020
Issue: 1

Drawing/Rotation:

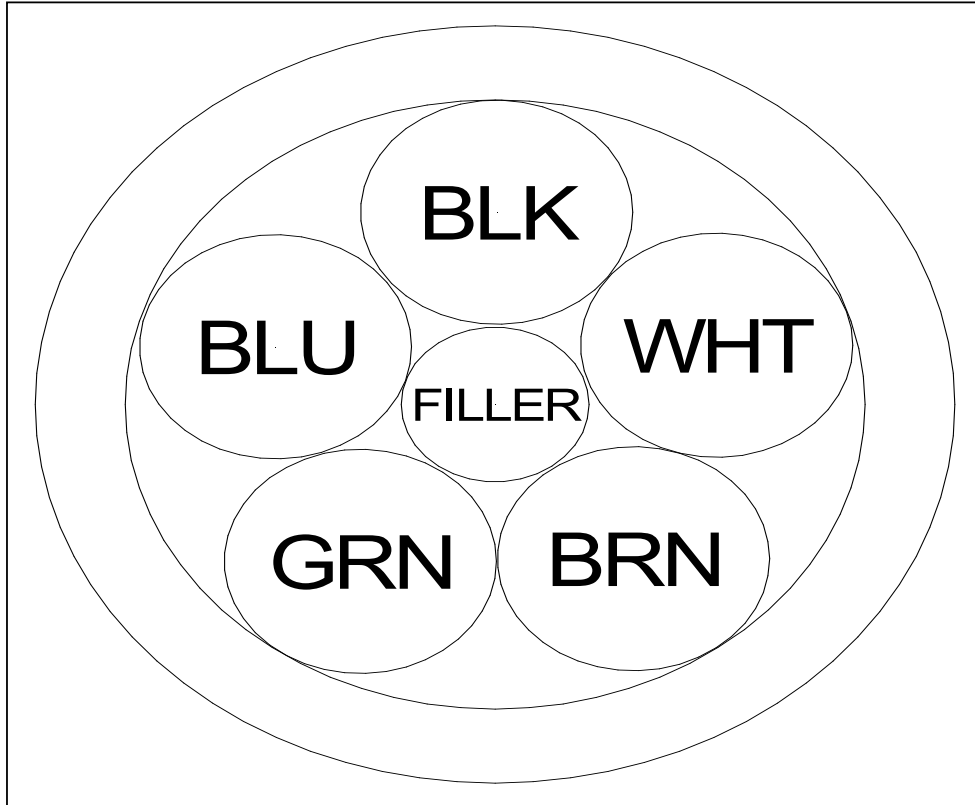

IQ-20021